

# Flow

Acoustic Wall Panel





spinneybeck




**An acoustic  
wall system that's  
in full Flow.**

See the big picture of sound absorption with Flow. This panelized acoustic system comes in one panel size available in four different profiles that combine in a multitude of patterns. The four styles feature Linear Flexible Wood that rises and falls over an acoustic box with polyester fleece infill to maximize acoustic absorption.


Flow was designed by Bernd Benninghoff, a furniture designer and interior architect based in Mainz, Germany.

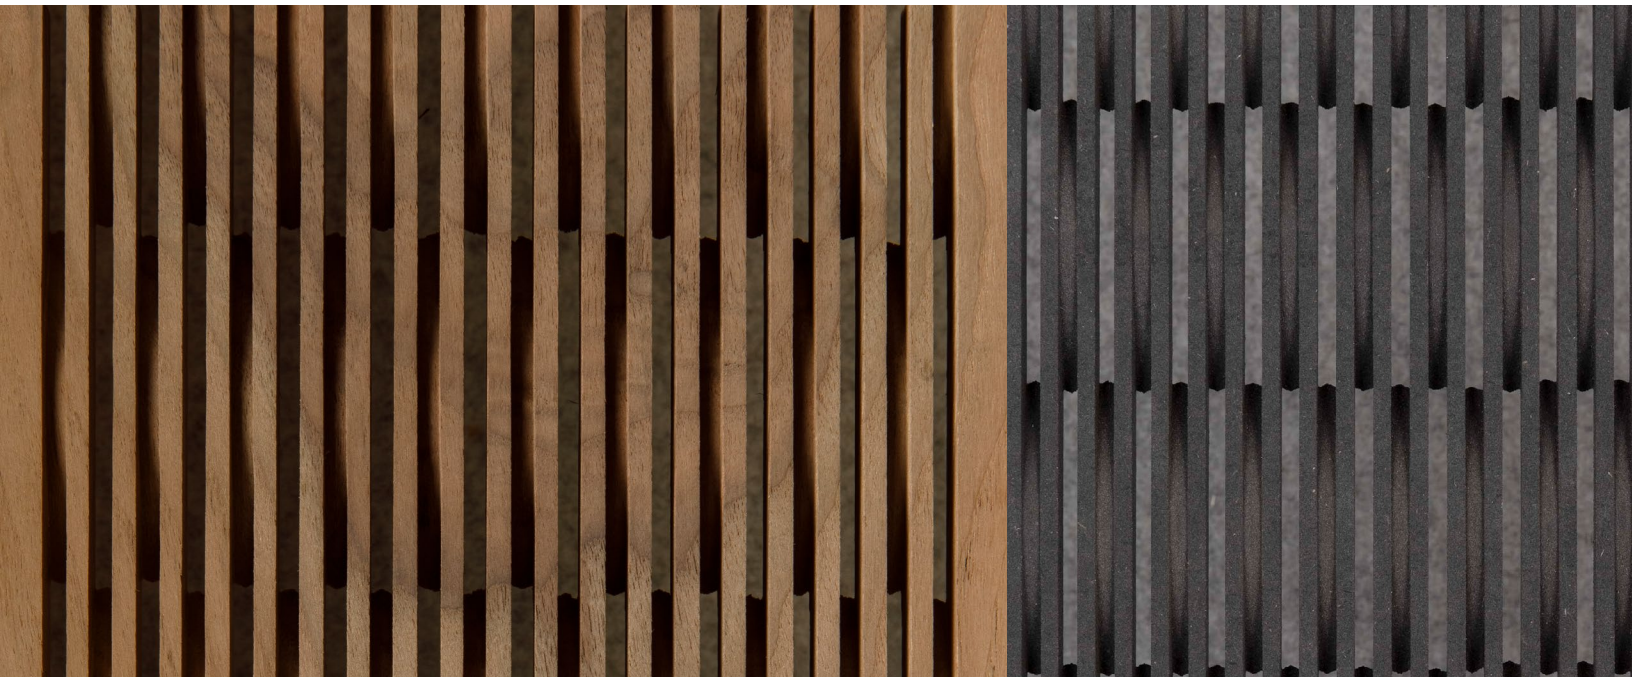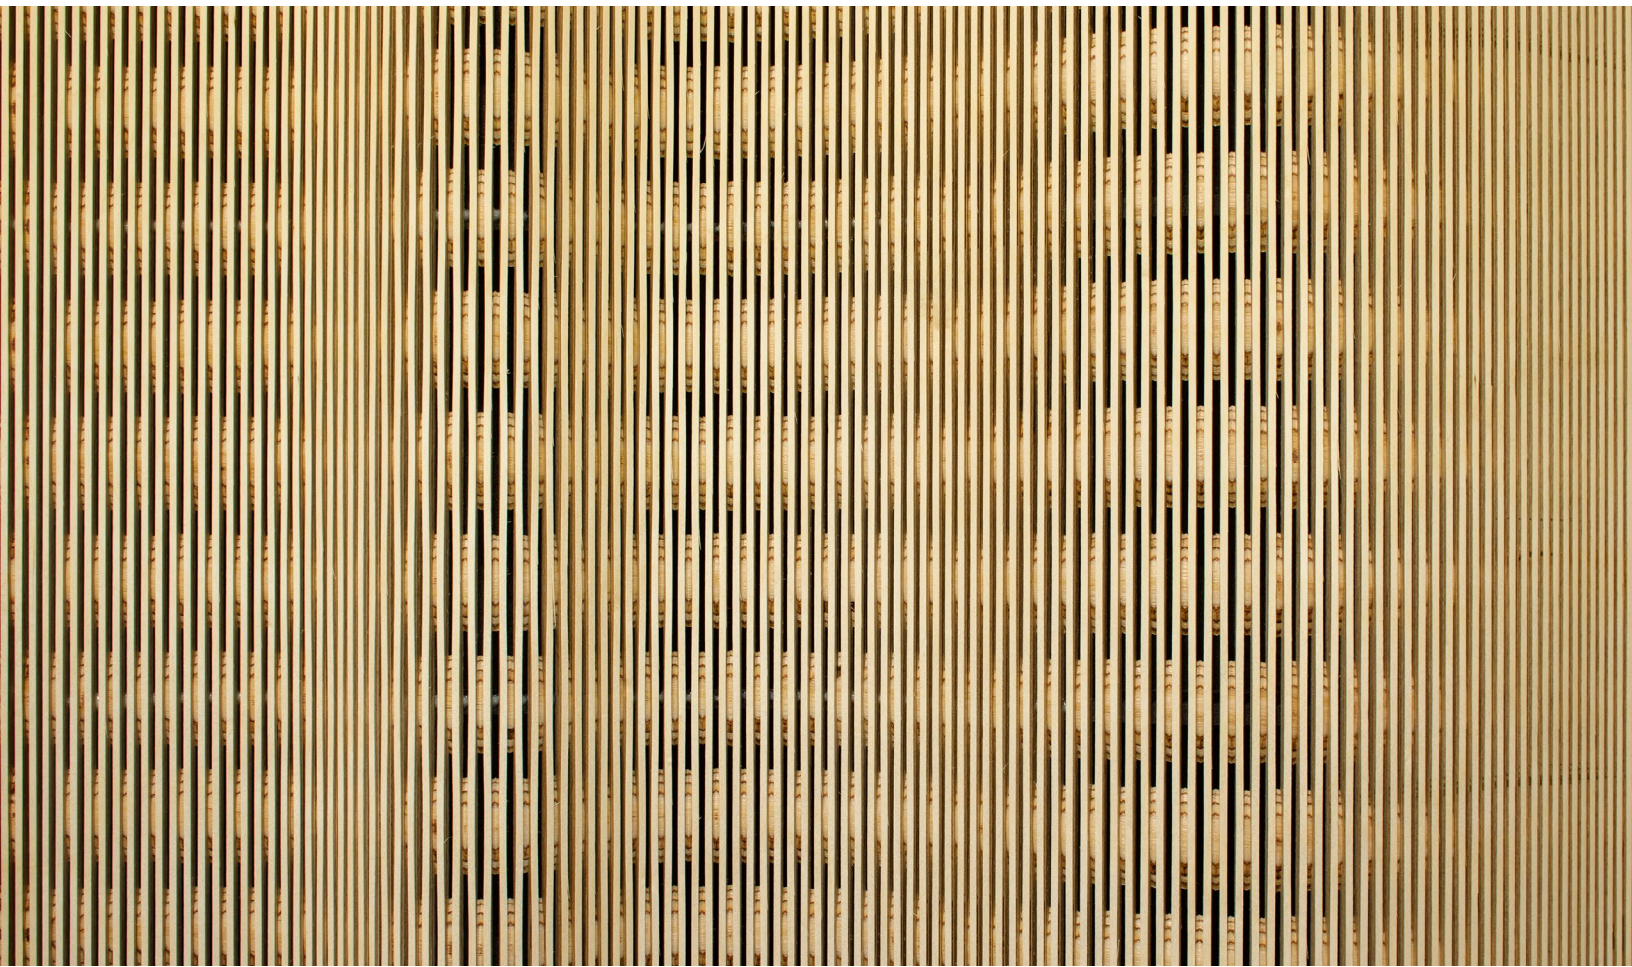

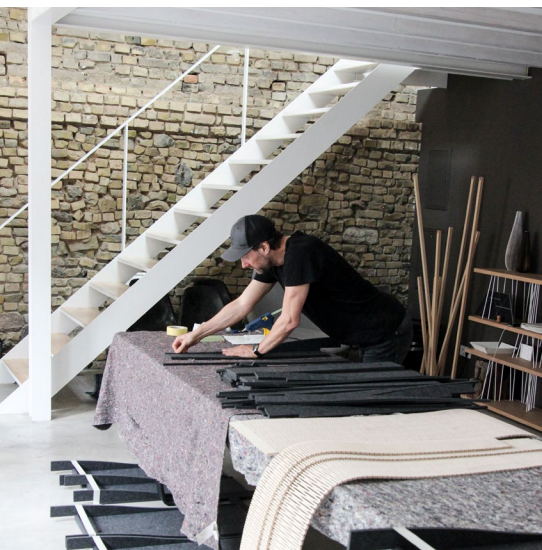

**“My goal is to develop products that are easy to manufacture and to install – but at the same time generate a strong three-dimensional surface that creates a warm atmosphere and plays with light and shadow.”**

– Bernd Benninghoff, designer of Flow

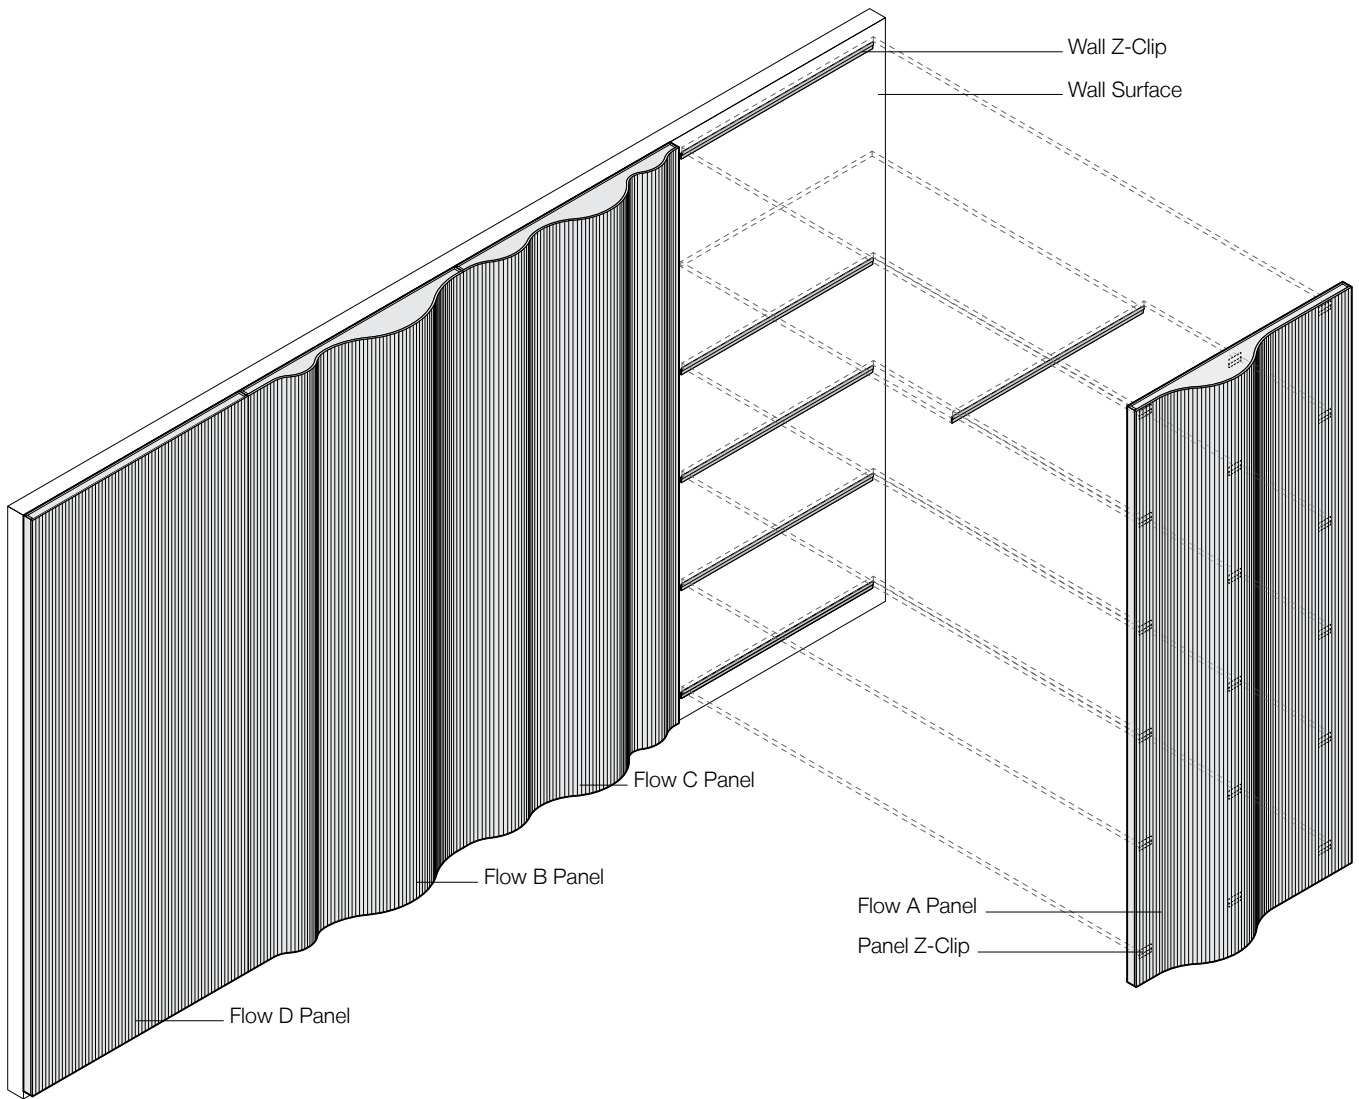

**Exploded Axonometric**

<b>Product</b>	Flow
<b>Designer</b>	Bernd Benninghoff
<b>Content</b>	Flexible Wood + Akustika 10 Substrate with polyester fleece infill
<b>Panel Options</b>	A, B, C, D
<b>Panel Size</b>	3'-5" x 7'-10 3/4" (104.1 x 240.7 cm)
<b>Thickness</b>	A, B: 5 15/16 in (15.5 cm) C: 5 11/16 in (15.1 cm) D: 1 15/16 in (5.4 cm) (includes Z-Clips)
<b>Wood Pattern</b>	Linar Flexible Wood
<b>Wood Open Area</b>	20–40%
<b>Custom</b>	Custom sizes must be quoted
<b>Durability</b>	Contract or residential
<b>Lead Time</b>	Made to order and certain lead times will apply
<b>Installation</b>	Install in the pattern as specified and attach to a wall surface with Z-Clips provided (wall screws not included). Refer to Flow Installation Instructions for complete guidance.
<b>Maintenance</b>	Dust regularly. Spot clean with cloth dampened with water only.
<b>Variation</b>	Wood is a natural material and minor changes in color are evidence of the 100% natural origin of the material. Please note that Finished Wood Type may have a more pronounced grain.
<b>Environmental</b>	Akustika 10 contains minimum 60% post-consumer recycled content and is 100% recyclable Akustika 10 contributes to LEED®
<b>Acoustics</b>	ASTM C 423: NRC – 0.75, SAA – 0.73
<b>Flammability</b>	Test reports available upon request

**Standard Woods**




Baltic Birch Plywood Natural



Baltic Birch Plywood Finished

**Standard Akustika 10 Substrate**



Dark Grey