




**Cervo**  
Upholstery Leather

spinneybeck

# About

---

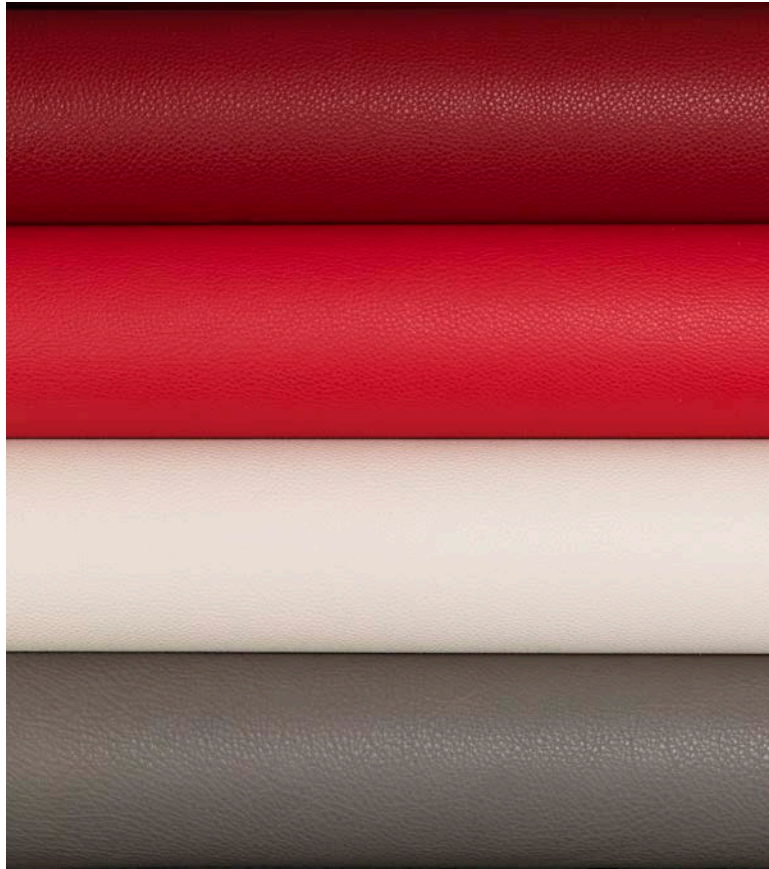

In Italian, the word Cervo translates to “deer.” This word personifies the luxurious hand that approximates the suppleness of deerskin. The unique tannage and specialized softening create a pronounced pebble grain characteristic in premium hides originating from Scandinavia. A blend of the finest quality aniline dyes provides excellent lightfastness properties for a naked leather, surpassing industry standards. Cervo also receives a greater saturation and dye enrichment than ordinary upholstery leathers.



# Specifications


<b>Name</b>	Cervo (CV)
<b>Content</b>	European cowhide
<b>Origin</b>	Italy
<b>Hide Size</b>	50–55 ft <sup>2</sup> (4.6–5.1 m <sup>2</sup> )
<b>Thickness</b>	1.4–1.6 mm
<b>Weight</b>	3.5–4.0 oz / ft <sup>2</sup> (1068–1221 g / m <sup>2</sup> )
<b>Grain</b>	Full
<b>Grain Texture</b>	Raised Pebble
<b>Tannage</b>	Chrome
<b>Dye</b>	Aniline
<b>Finish</b>	Very light
<b>Primary Uses</b>	Upholstery, handrails, wall panels, architectural applications
<b>Industry</b>	Contract, hospitality, marine, residential
<b>Maintenance</b>	Wipe entire surface with a soft cloth and cool water to even out any abrasions or stains. Do not spot rub, for it will darken only that area. Occasional use of Spinneybeck Aniline Leather Cleaner, Conditioner & Protector or Aniline Leather Maintenance Kit is recommended. Other leather cleaners such as saddle soap or household cleaners that may contain harsh chemicals, alcohol or ink removers should never be used.
<b>Custom</b>	Custom colors available on a select basis
<b>Special Services</b>	Perforated available with an upcharge
<b>Colorfastness to Light</b>	Class 3
<b>Colorfastness to Crocking</b>	Class 4 (dry)
<b>Flammability</b>	ASTM E 84: Class A (flame treated) CAL 117: Pass CAL 133: Successfully used in CAL 133 applications with Firegard F187 fire backer material or equivalent (flame treated)
<b>Durability + Strength</b>	Abrasion ASTM D 7255: n/a Breaking Force ASTM D 2208: 500 lb Elongation ASTM D 2211: 30–50% at 50 lb Flex ASTM D 2097: n/a Tearing Strength ASTM D 4705: 50 lb

# Standard Colors

---



CV 0040



CV 0041




CV 0046



CV 0051



CV 0042



CV 0045



CV 0043



CV 0044



CV 0047



CV 0048



CV 0049



CV 0050



CV BLCK