


# Copenhagen

Upholstery Leather

spinneybeck

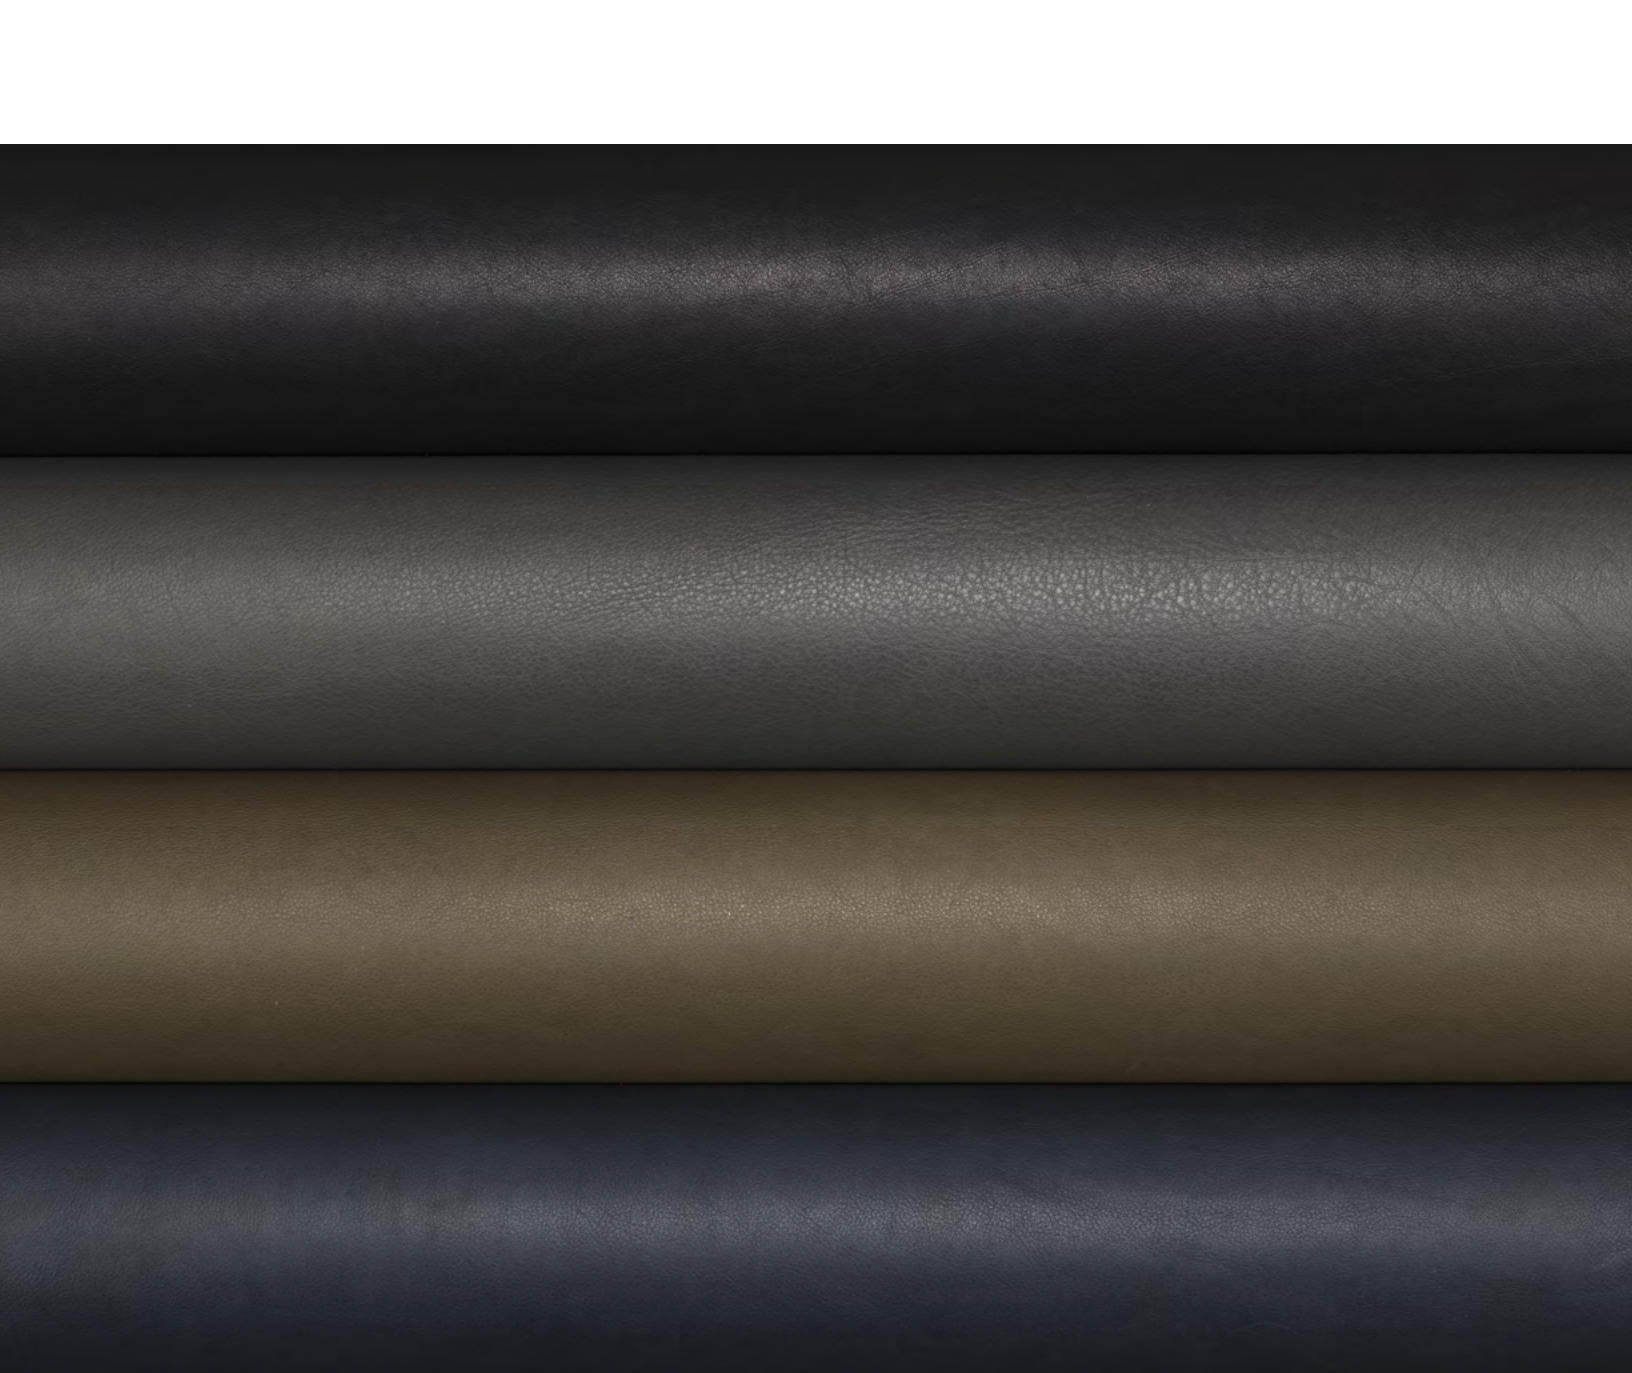

**Copenhagen  
is subtle and  
sophisticated.**

Inspired by its namesake city, Copenhagen is a premium select 100 percent vegetable tanned and aniline dyed upholstery leather in a series of subtle but sophisticated colorways. Showcasing the clarity of raw material originating from Scandinavia, all of the natural characteristics of a premium full grain leather are revealed. The unique tannage provides a luxurious drape and suppleness of hand highlighted by the rich aniline dyes. A blend of the finest quality aniline dyes provides excellent light fastness properties for a naked leather.

<b>Product</b>	Copenhagen (CO)
<b>Content</b>	European cowhide
<b>Origin</b>	Italy
<b>Hide Size</b>	45–50 sq ft (4.2–4.6 sq m)
<b>Thickness</b>	1.1–1.2 mm
<b>Weight</b>	2.75–3.0 oz / sq ft (839–915 g / sq m)
<b>Grain</b>	Full
<b>Grain Texture</b>	Smooth, tight
<b>Tannage</b>	Vegetable
<b>Dye</b>	Aniline
<b>Finish</b>	Naked
<b>Primary Uses</b>	Upholstery, handrails, wall panels, architectural applications
<b>Industry</b>	Contract, hospitality, marine, residential
<b>Maintenance</b>	Wipe entire surface with a soft cloth and cool water to even out any abrasions or stains. Do not spot rub, for it will darken only that area. Occasional use of Spinneybeck Aniline Leather Cleaner, Conditioner & Protector is recommended. Other leather cleaners such as saddle soap or household cleaners that may contain harsh chemicals, alcohol or ink removers should never be used.
<b>Custom</b>	Custom colors available on a select basis
<b>Special Services</b>	Perforated available with an upcharge
<b>Variation</b>	Color variation of naked leathers may be more pronounced beyond the normal commercial range. A Cutting for Approval (CFA) is required for all orders.
<b>Colorfastness to Light</b>	Class 2–3
<b>Colorfastness to Crocking</b>	Class 2–3 (dry)
<b>Flammability</b>	CAL 117: Pass CAL 133: Successfully used in CAL 133 applications with Firegard F187 fire backer material or equivalent (flame treated)
<b>Durability + Strength</b>	Abrasion ASTM D 7255: n/a Breaking Force ASTM D 2208: 200 lb Elongation ASTM D 2211: 30–50% at 50 lb Flex ASTM D 2097: n/a Tearing Strength ASTM D 4705: 25 lb

#### Standard Colors

