




Copenhagen

Upholstery Leather

spinneybeck

About

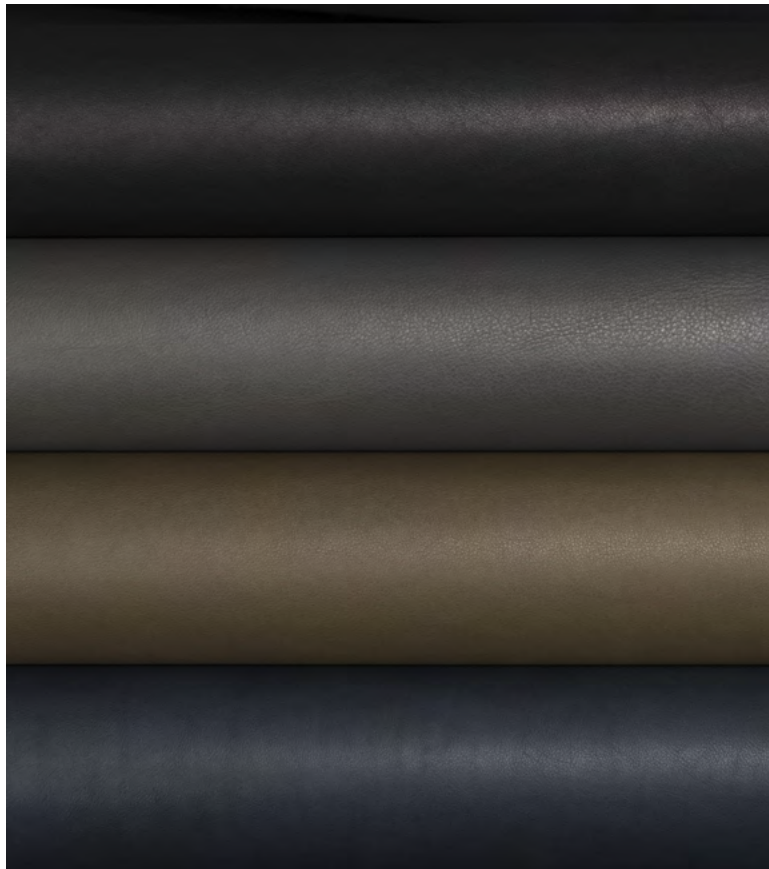

Inspired by its namesake city, Copenhagen is a premium select 100 percent vegetable tanned and aniline dyed upholstery leather in a series of subtle but sophisticated colorways. Showcasing the clarity of raw material originating from Scandinavia, all of the natural characteristics of a premium full grain leather are revealed. The unique tannage provides a luxurious drape and suppleness of hand highlighted by the rich aniline dyes. A blend of the finest quality aniline dyes provides excellent light fastness properties for a naked leather.




Specifications

Name	Copenhagen (CO)
Content	European cowhide
Origin	Italy
Hide Size	45–50 ft ² (4.2–4.6 m ²)
Thickness	1.1–1.2 mm
Weight	2.75–3.0 oz / ft ² (839–915 g / m ²)
Grain	Full
Grain Texture	Smooth, tight
Tannage	Vegetable
Dye	Aniline
Finish	Naked
Primary Uses	Upholstery, handrails, wall panels, architectural applications
Industry	Contract, hospitality, marine, residential
Maintenance	Wipe entire surface with a soft cloth and cool water to even out any abrasions or stains. Do not spot rub, for it will darken only that area. Occasional use of Spinneybeck Aniline Leather Cleaner, Conditioner & Protector or Aniline Leather Maintenance Kit is recommended. Other leather cleaners such as saddle soap or household cleaners that may contain harsh chemicals, alcohol or ink removers should never be used.
Custom	Custom colors available on a select basis
Special Services	Perforated available with an upcharge
Variation	Color variation of naked leathers may be more pronounced beyond the normal commercial range. A Cutting for Approval (CFA) is required for all orders.
Colorfastness to Light	Class 2–3
Colorfastness to Crocking	Class 2–3 (dry)
Flammability	CAL 117: Pass CAL 133: Successfully used in CAL 133 applications with Firegard F187 fire backer material or equivalent (flame treated) Cigarette Ignition Resistance NFPA 260: Class 1
Durability + Strength	Abrasion ASTM D 7255: n/a Breaking Force ASTM D 2208: 200 lb Elongation ASTM D 2211: 30–50% at 50 lb Flex ASTM D 2097: n/a Tearing Strength ASTM D 4705: 25 lb

Standard Colors




CO 2217




CO 2216



CO 2203



CO 2205




CO 2215



CO 2218




CO 2210




CO 2206



CO 2207



CO 2209



CO 2208



CO 2214




CO 2204



CO 2202



CO 2201



CO 2213



CO 2212



CO 2211



CO BLCK