

Design 406

Wall Panel

spinneybeck



**Design 406
carves out a
place of its own.**

Design 406, by mid-century visionary designer Erwin Hauer, is a carved wall system that combines the beauty of natural materials with the sophisticated curves core to his aesthetic. Highlighting a range of natural materials, Design 406 is available in six wood species, with the option to add painted color or Spinneybeck upholstery leather, allowing Hauer's timeless designs to suit any space. This clever modular system is comprised of individual planks that come together to form an uninterrupted composition.

Design 406 was designed by Erwin Hauer, a sculptor whose infinite continuous room dividers have been deemed “quintessential works of modernism.”



Design 406 in Sabrina Upholstery Leather (SA 785)






Design 406 in Douglas Fir



Design 406 in White Oak



Design 406 in Sapele

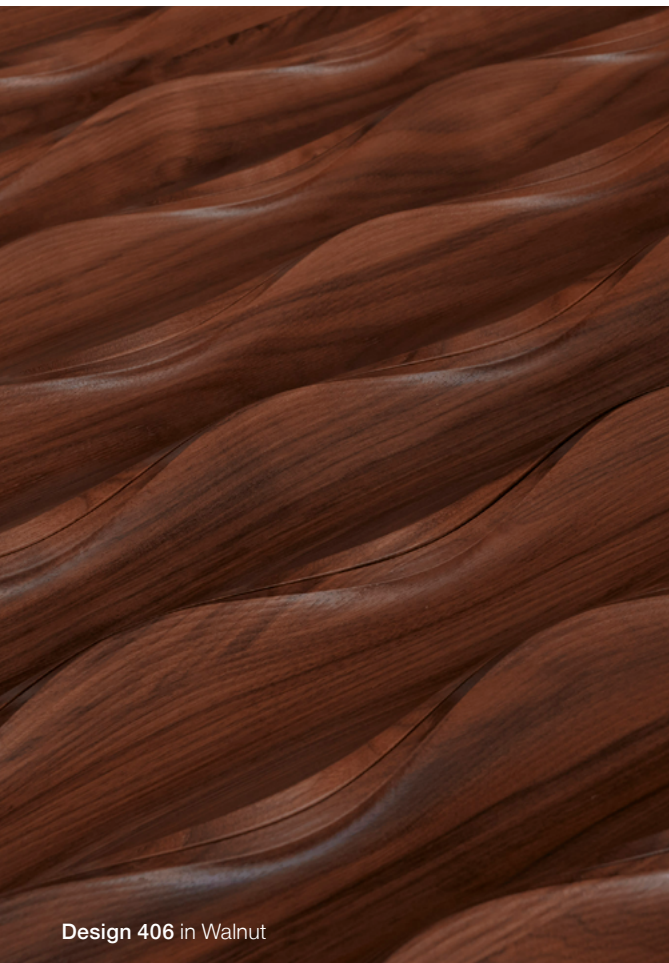

Design 406 in Walnut



Design 406 in Beech



Design 406 in Maple




Design 406 in Painted MDF




"While in art school I did take a classical curriculum, but at one point, after having seen the work of Henry Moore, I began to see things differently, with a particular attention to the anticlastic surface."

– Erwin Hauer, designer of Design 406

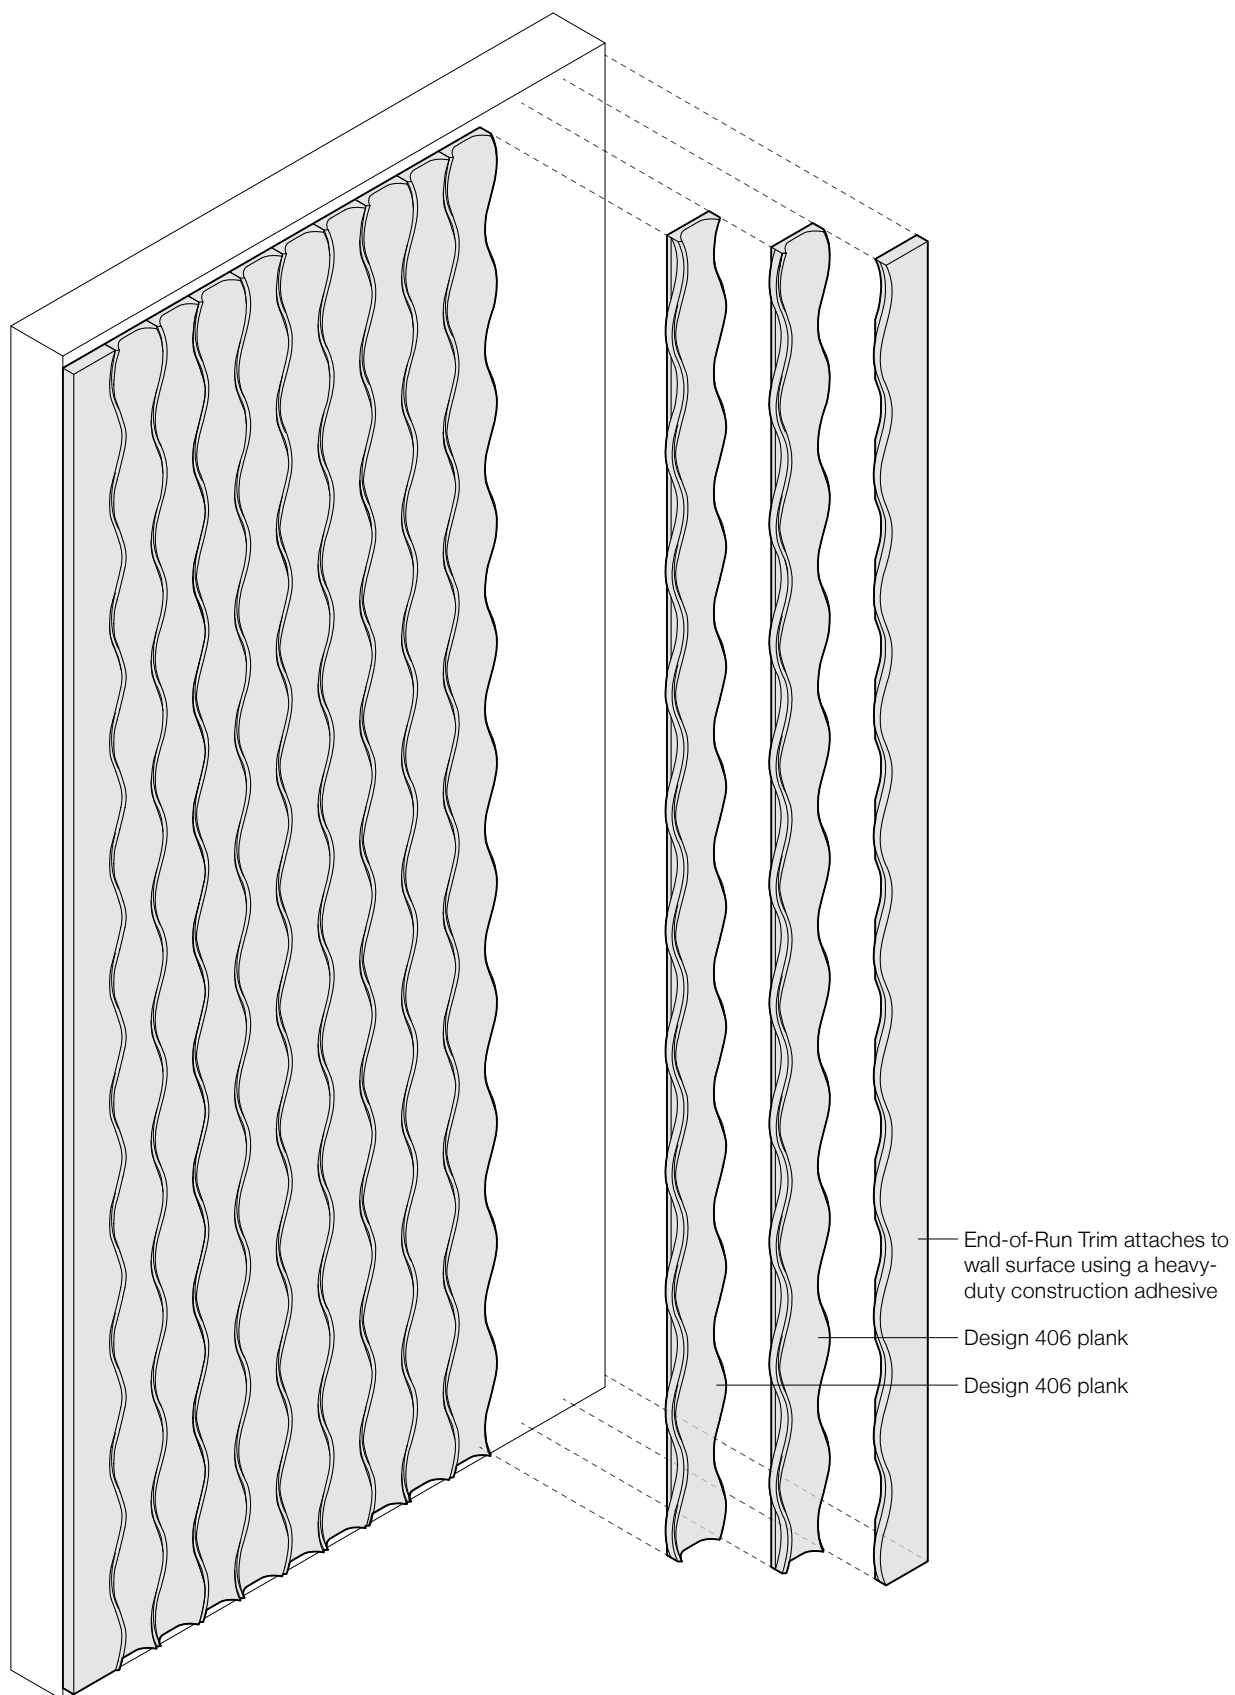

Exploded Axonometric

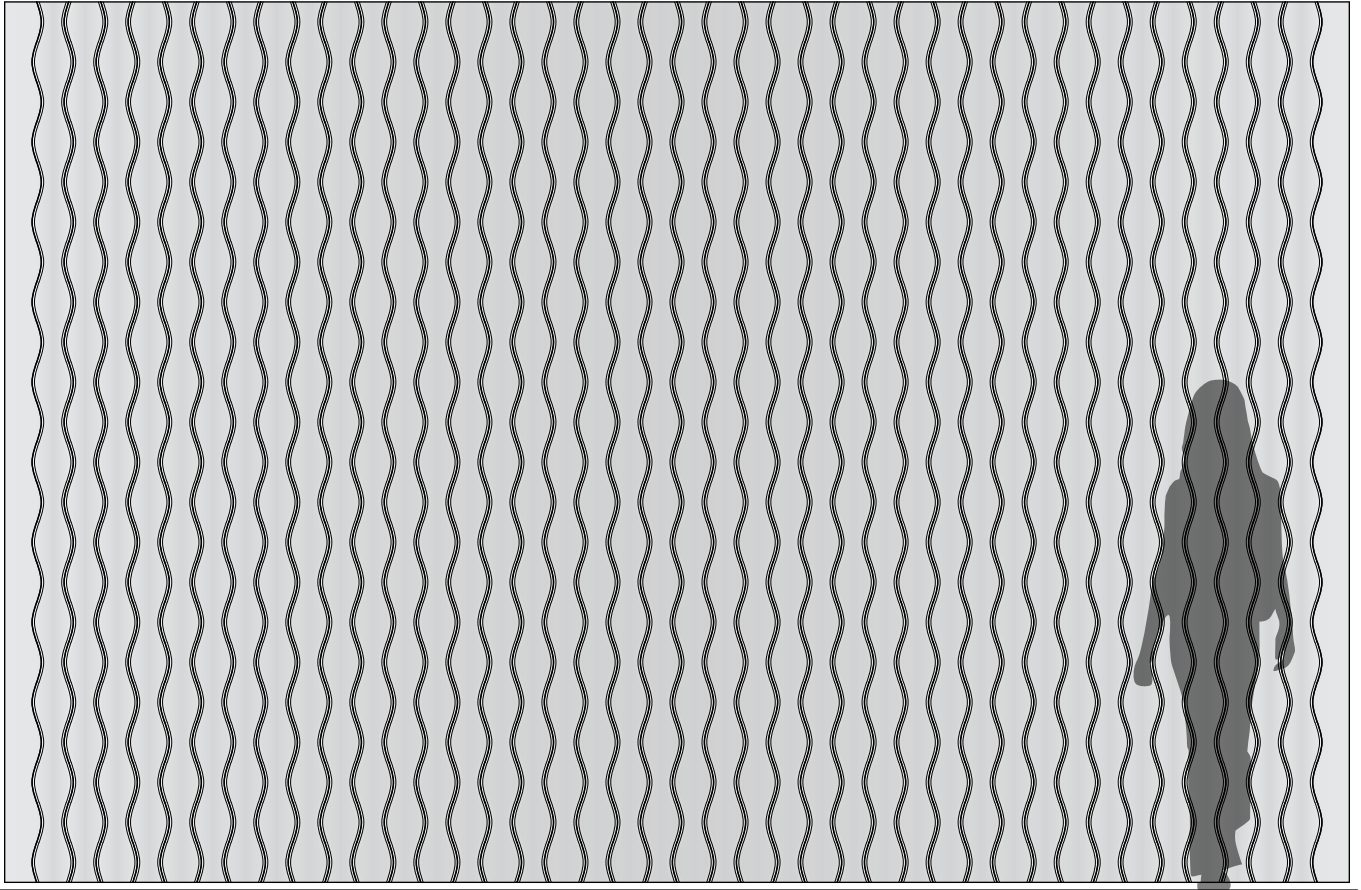


Front Elevation



Section

Product	Design 406
Designer	Erwin Hauer
Content	Wood (Solid wood or MDF)
Nominal Plank Width	4 in (10.2 cm)
Maximum Length	9'-2" (279.4 cm)
Thickness	1 1/4 in (3.1 cm)
Grain Direction	Vertical
Color Option	1-Color per wall
Trim	Includes End-of-Run Trim
Custom	Painted MDF may be specified in any paint color 2-Color+ per wall is available and must be quoted Painted or clear coat finish on edge is available for an upcharge.
Durability	Contract or residential
Lead Time	Made to order and certain lead times will apply
Installation	Planks are easily installed to a clean and dry surface with screws appropriate for the wall type. End-of-Run Trim is direct glued into place after the planks are installed using heavy-duty construction adhesive. Please note that wall screws are not provided and additional blocking at installation site may be required. Installation services are available through Spinneybeck.
Maintenance	Use a very mild non-abrasive non-ammonia, and non-alcohol containing soap diluted in a room temperature water solution. Apply with a soft flannel cloth, followed by a dry cloth. Always wipe in the direction of the grain. Never use commercial cleaners, abrasives, solvents, or glass cleaner on any wood as it will wear away the finish. Never apply wax as this will interact with the finish.
Variation	Wood is a natural material and minor changes in color are evidence of the 100% natural origin of the material.
Environmental	Contains no formaldehyde CARB Compliant Solid woods are inherently non-emitting
Flammability	Solid woods meet ASTM E 84: Class A (with applied Fire Retardant) Solid woods meet CAN ULC S102.2-18: FS: 20 / SDI: 95-105 (with applied Fire Retardant)

Standard Colors




Painted MDF



Beech




Maple

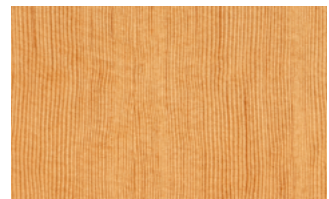


Douglas Fir



White Oak

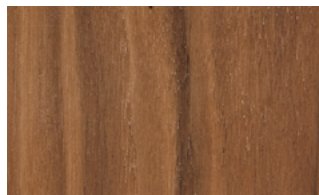






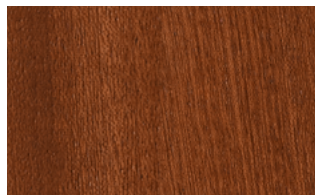




















Walnut



Sapele

Product	Design 406
Designer	Erwin Hauer
Content	European Cowhide + MDF
Nominal Plank Width	4 in (10.2 cm)
Maximum Length	9'-2" (279.4 cm)
Thickness	1 1/4 in (3.1 cm)
Color Option	1-Color per wall
Leather Seams	Seams with top stitch detail are placed at random intervals in matching thread color unless otherwise specified.
Trim	Includes End-of-Run Trim
Custom	2-Color+ per wall is available and must be quoted.
Durability	Contract or residential
Lead Time	Made to order and certain lead times will apply
Installation	Planks are easily installed to a clean and dry surface with screws appropriate for the wall type. End-of-Run Trim is direct glued into place after the planks are installed using heavy-duty construction adhesive. Please note that wall screws are not provided and additional blocking at installation site may be required. Installation services are available through Spinneybeck.
Maintenance	For finished leathers, wipe with a cool, damp cloth. For tougher soiling, use a pH-balanced soap and rinse. Repeat, if needed. For naked (aniline) leathers, wipe entire surface with a soft cloth and cool water to even out any abrasions or stains. Do not spot rub, for it will darken only that area. Occasional use of Spinneybeck maintenance products is recommended. Other leather cleaners such as saddle soap or household cleaners that may contain harsh chemicals, alcohol or ink removers should never be used.
Variation	Color variation of naked leathers may be more pronounced beyond the normal commercial range. A Cutting for Approval (CFA) is required for all orders.
Environmental	Leather is 100% Biodegradable/compostable
Standard Leather Qualities	Refer to Color Book for available colors in standard leather qualities

						
Acqua (AU)	Alaska (AL)	Amalfi (AF)	Andes (AD)	Antique (AQ)	Cascia (CA)	Cervo (CV)
						
Copenhagen (CO)	Derby (DE)	Distressed (DT)	Ducale Velour (DV)	Embossed Tipped (ET)	España (ES)	Forte (FE)
						
Hand Tipped (HT)	Lucca (LC)	Lucente (LU)	Portofino (PT)	Riva (RA)	Rugata (RU)	Sabrina (SA)
						
Saddle (SL)	Umbria (UM)	Velluto Pelle (VP)	Vicenza (VZ)	Volo (VO)		