



Embossed Tipped

Upholstery Leather


spinneybeck

About



Embossed Tipped is a two-tone leather, produced from a premium selection of raw material originating from northern and southern Germany and Switzerland. Unlike Hand Tipped, the full grain surface is embossed with a pebble grain pattern to provide a consistent, uniform grain texture. The two-tone effect is achieved through the base dye coloration followed by a treatment where the tip of the pebble grain is dyed by hand with a dark overtone. The surface is further enhanced with a light clear coat application followed by a specialized ironing process.


Embossed Tipped is lighter in weight than Hand Tipped. The average thickness ranges between 1.1 mm to 1.3 mm (as opposed to Hand Tipped, which is 1.4 mm to 1.6 mm). This allows for applications where a heavier weight leather may not be suitable.

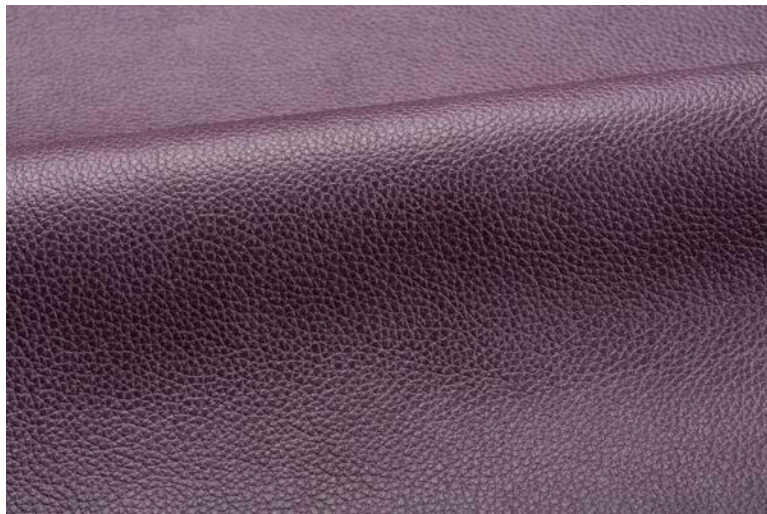


Specifications

Name	Embossed Tipped (ET)
Content	European cowhide
Origin	Italy
Hide Size	50–55 ft ² (4.6–5.1 m ²)
Thickness	1.1–1.3 mm
Weight	2.75–3.25 oz / ft ² (839–992 g / m ²)
Grain	Full
Grain Texture	Embossed pronounced pebble
Tannage	Chrome
Dye	Aniline
Finish	Light
Primary Uses	Upholstery, handrails, rugs, wall panels, architectural applications
Industry	Automotive, aviation, contract, hospitality, marine, residential
Maintenance	Wipe with a cool, damp cloth. For tougher soiling, use a pH-balanced soap and rinse. Repeat, if needed. Occasional use of Spinneybeck Finished Leather Cleaner, Conditioner & Protector or Finished Leather Maintenance Kit is recommended. Other leather cleaners such as saddle soap or household cleaners that may contain harsh chemicals, alcohol or ink removers should never be used.
Custom	Custom color are not available
Special Services	Flame treatment and perforated available with an upcharge
Colorfastness to Light	Class 4
Colorfastness to Crocking	Class 4–6 (dry), Class 4 (wet)
Flammability	ASTM E 84: Class A (flame treated) Boston Fire Dept BFD IX-1: Pass (flame treated) BS EN1021 (Part I and Part II): Pass BS 5852 Crib 5 and Crib 7: Pass (flame treated) CAL 117: Pass CAL 133: Successfully used in CAL 133 applications with Firegard F187 fire backer material or equivalent (flame treated) Cigarette Ignition Resistance NFPA 260: Class 1 FAR 25.853(a) 60 sec vertical burn, 12 sec vertical burn. Oil burner-fire block: Pass IMO Resolution A.652 (16): Pass IMO Resolution A.653 (16) Part 2 and 5: Pass (flame treated) NF P 95 512 1986 (Electric Burner Test): Class M1 (flame treated), Class M2 (flame treated)
Durability + Strength	Abrasion ASTM D 7255: n/a Breaking Force ASTM D 2208: 250 lb Elongation ASTM D 2211: 30–50% at 50 lb Flex ASTM D 2097: 70,000 flexes Tearing Strength ASTM D 4705: 55 lb


Standard Colors




ET 0184



ET 0185



ET 0169



ET 0168




ET 0165




ET 0166




ET 0167




ET 0164




ET 0175



ET 0176



ET 0174



ET 0187




ET 0186



ET 0180



ET 0162



ET 0163



ET 0161



ET 0179




ET 0178




ET 0177




ET 0181



ET 0172




ET 0171



ET 0173




ET 0170




ET 0182




ET 0183



ET 0191



ET 0190



ET 0189



ET 0188