



# Floor Tile

spinneybeck

# About

---



Designed exclusively for Spinneybeck by noted architect, Emanuela Frattini Magnusson, Floor Tiles exhibit all of the beautiful, natural, and varied characteristics of full grain, aniline dyed leather. The natural feel of leather is enhanced through Spinneybeck's proprietary process which results in a tile that is resilient and stable. The virtually unlimited combinations of colors, shapes, and tile dimensions allow for truly custom applications for floors, stairs, and walls. Applied directly on concrete floors or a smooth hardwood surface, leather suppresses sound and adds a warm, luxurious feel to the room.




Using the same process as in making fine saddlery, Spinneybeck Leather Tiles are 100 percent vegetable tanned leather. A special combination of chestnut and mimosa bark forms the basis of the three-week tanning process. As the leather moves through the production phases, the hides are trimmed several times to ensure a more uniform, useable shape. Prior to being cut and sized, a light application of a water repellent finish is applied. This protective coating is absorbed into the tiles and becomes an integral part of the leather surface, thus providing resistance to abrasion, fading, and staining while still highlighting the smooth tight natural texture of the leather. Like hardwood floors, Spinneybeck Floor Tiles will develop a rich patina and age beautifully over time.


Emanuela Frattini Magnusson is the founder and principal of EFM Design, an international, award-winning, multi-disciplinary practice that spans architecture, interiors, product design, brand development, and graphics.

# Standard Sizes

---

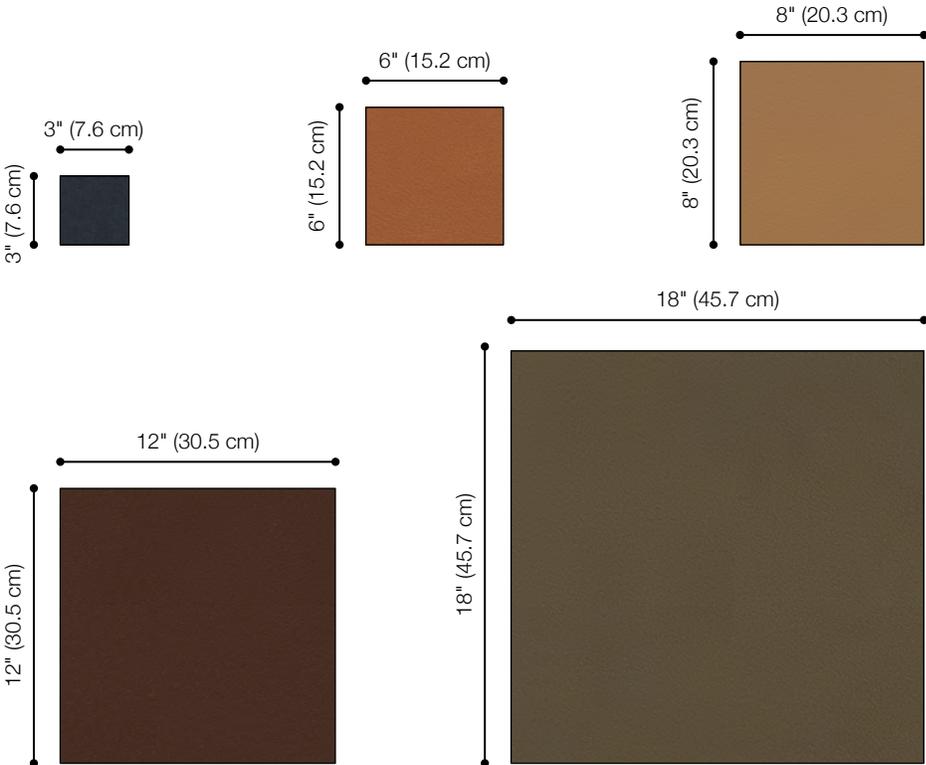


**Square**

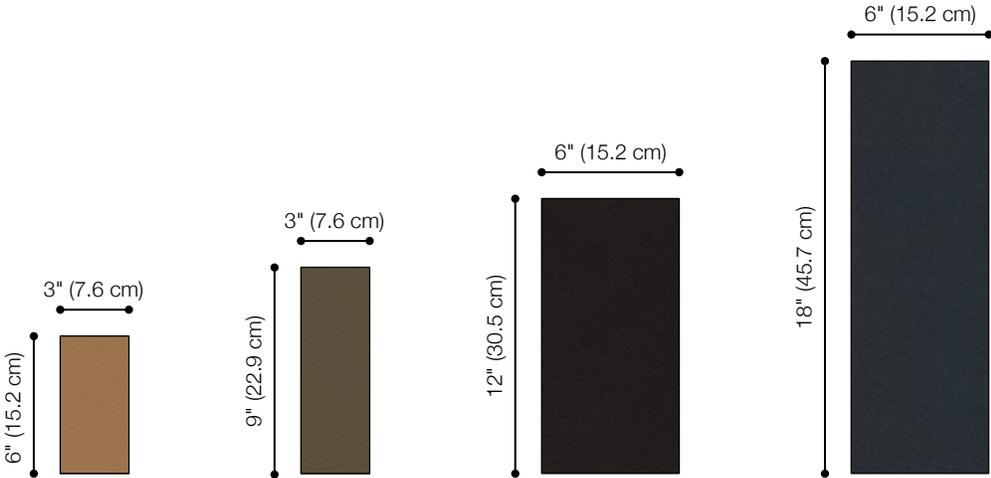


**Rectangle**


# Standard Sizes

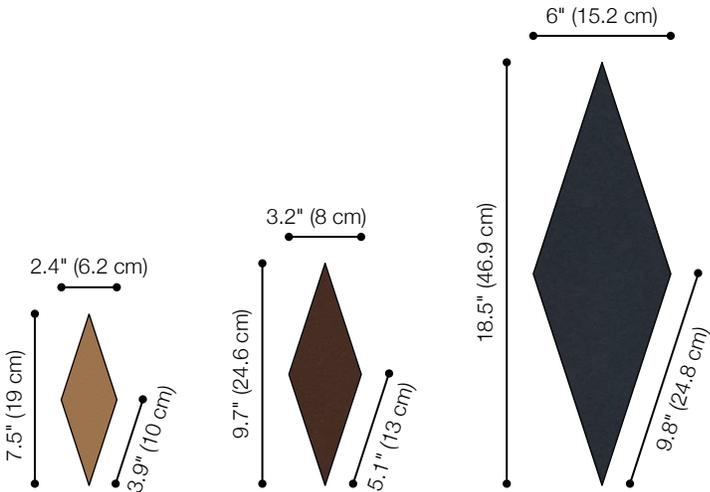


**Diamond**

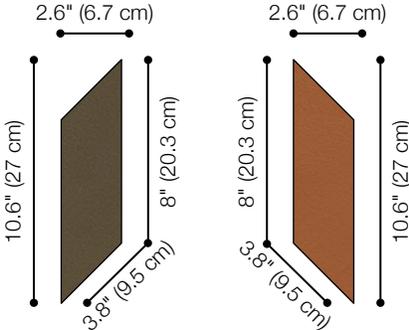

**Herringbone**

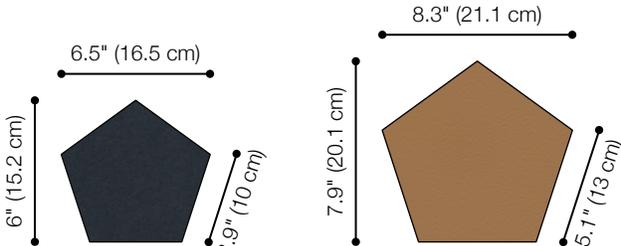

**Pentagon**

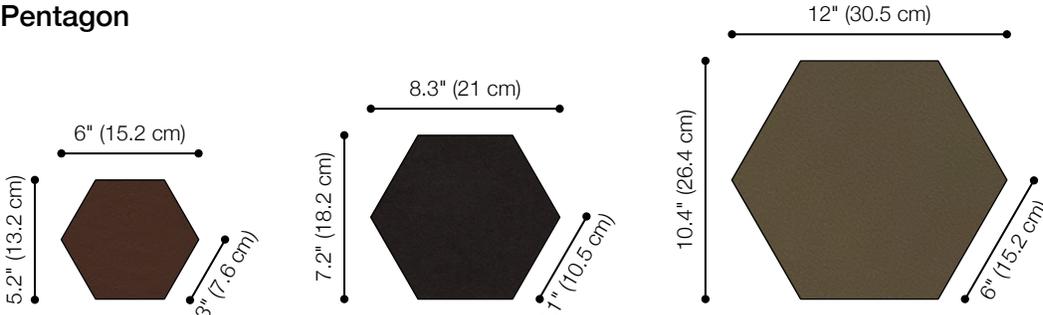

**Hexagon**

# Specifications

<b>Name</b>	Floor Tile
<b>Designer</b>	Emanuela Frattini Magnusson
<b>Content</b>	European cowhide
<b>Square Sizes</b>	3 x 3 in (7.6 x 7.6 cm), 6 x 6 in (15.2 x 15.2 cm), 8 x 8 in (20.3 x 20.3 cm), 12 x 12 in (30.5 x 30.5 cm), 18 x 18 in (45.7 x 45.7 cm)
<b>Rectangle Sizes</b>	3 x 6 in (7.6 x 15.2 cm), 3 x 9 in (7.6 x 22.9 cm), 6 x 12 in (15.2 x 30.5 cm), 6 x 18 in (15.2 x 45.7 cm)
<b>Diamond Sizes</b>	2.4 x 7.5 in (6.2 x 19 cm), 3.2 x 9.7 in (8 x 24.6 cm), 6 x 18.5 in (15.2 x 46.9 cm)
<b>Herringbone Sizes</b>	2.6 x 10.6 in (6.7 x 27 cm)
<b>Pentagon Sizes</b>	6.5 x 6 in (16.5 x 15.2 cm), 8.3 x 7.9 in (21.1 x 20.1 cm)
<b>Hexagon Sizes</b>	6 x 5.2 in (15.2 x 13.2 cm), 8.3 x 7.2 in (21 x 18.2 cm), 12 x 10.4 in (30.5 x 26.4 cm)
<b>Thickness</b>	3.5 mm
<b>Weight</b>	8.75 oz per ft <sup>2</sup> (2670 g per m <sup>2</sup> )
<b>Grain</b>	Full
<b>Tannage</b>	Vegetable
<b>Dye</b>	Aniline
<b>Finish</b>	Aqueous-based water repellent
<b>Primary Uses</b>	Flooring, vertical
<b>Industry</b>	Contract, hospitality, residential
<b>Maintenance</b>	Frequently sweep or vacuum with a soft bristle brush to remove loose dirt and debris. Since there is a water-resistant finish on the tiles, liquid will not immediately absorb into the surface. Blot any spills with a soft cloth but do not rub. If applied to the floor, damp mop the tiles approximately every 60 days. Use only water and ensure the mop is rung out well. Occasional conditioning with Spinneybeck Aniline Leather Cleaner, Conditioner & Protector is recommended. Tiles may be buffed with a soft, dry cloth or a floor buffer with a cotton pad. Never use leather cleaners such as saddle soaps, household cleaners such as Murphy's Oil Soap, cleaners that contain harsh chemicals, alcohol, or ink removers on the tiles.
<b>Lead Time</b>	Made to order and certain lead times will apply
<b>Installation</b>	Tiles may be trimmed and adjusted for size in the field with a straight edge and a commercial grade utility blade. Allow to acclimate on site for a minimum of one to two weeks. Floor installation may be applied to either finished grade plywood or concrete. Vertical application may be over finished grade plywood for new-build installations and multi-ply over existing drywall. Tiles will not adhere to drywall, gypsum board, or masonite. It is important that the surface be clean, dust-free and level. To ensure a successful installation, Spinneybeck strongly recommends that an installer who has experience with leather tile and has a long history of successful installations. For detailed instructions, please download Tiles Installation and Maintenance or contact Customer Service.
<b>Custom</b>	Custom shapes are available and require an upcharge. A 250 ft <sup>2</sup> (25 m <sup>2</sup> ) minimum is required for custom colors.
<b>Variation</b>	Leather Tiles are a natural product, there will be minor expansion and contraction related to environmental changes in temperature and humidity.
<b>Colorfastness to Light</b>	Class 2-3
<b>Colorfastness to Crocking</b>	Class 4-5 (dry), Class 4 (wet)
<b>Slip Resistance</b>	ASTM C 1028 Coefficient of Friction: 0.50+ (satisfies ADA)
<b>Flammability</b>	Boston Fire Dept BFD IX-1: Pass CAL 117: Pass
<b>Durability + Strength</b>	Breaking Force ASTM D 2208: 500 lb Elongation ASTM D 2211: 0-10% at 50 lb

# Standard Colors

---



FT 1105



FT 1109



FT 1102



FT 1104



FT 1100



FT BLCK