



Muro

Wall Panel

spinneybeck


About



Muro adds character and style to a wide range of wall, headboard, and ceiling applications. With more than 1,000 standard colorways in 30 leather types, the leather wall panels offer a refined alternative to vertical surfacing. Available in 29 leather qualities and almost 1,000 colors, all panels come preinstalled with Z-Clip fasteners for easy hanging.



Z-Clip Installation

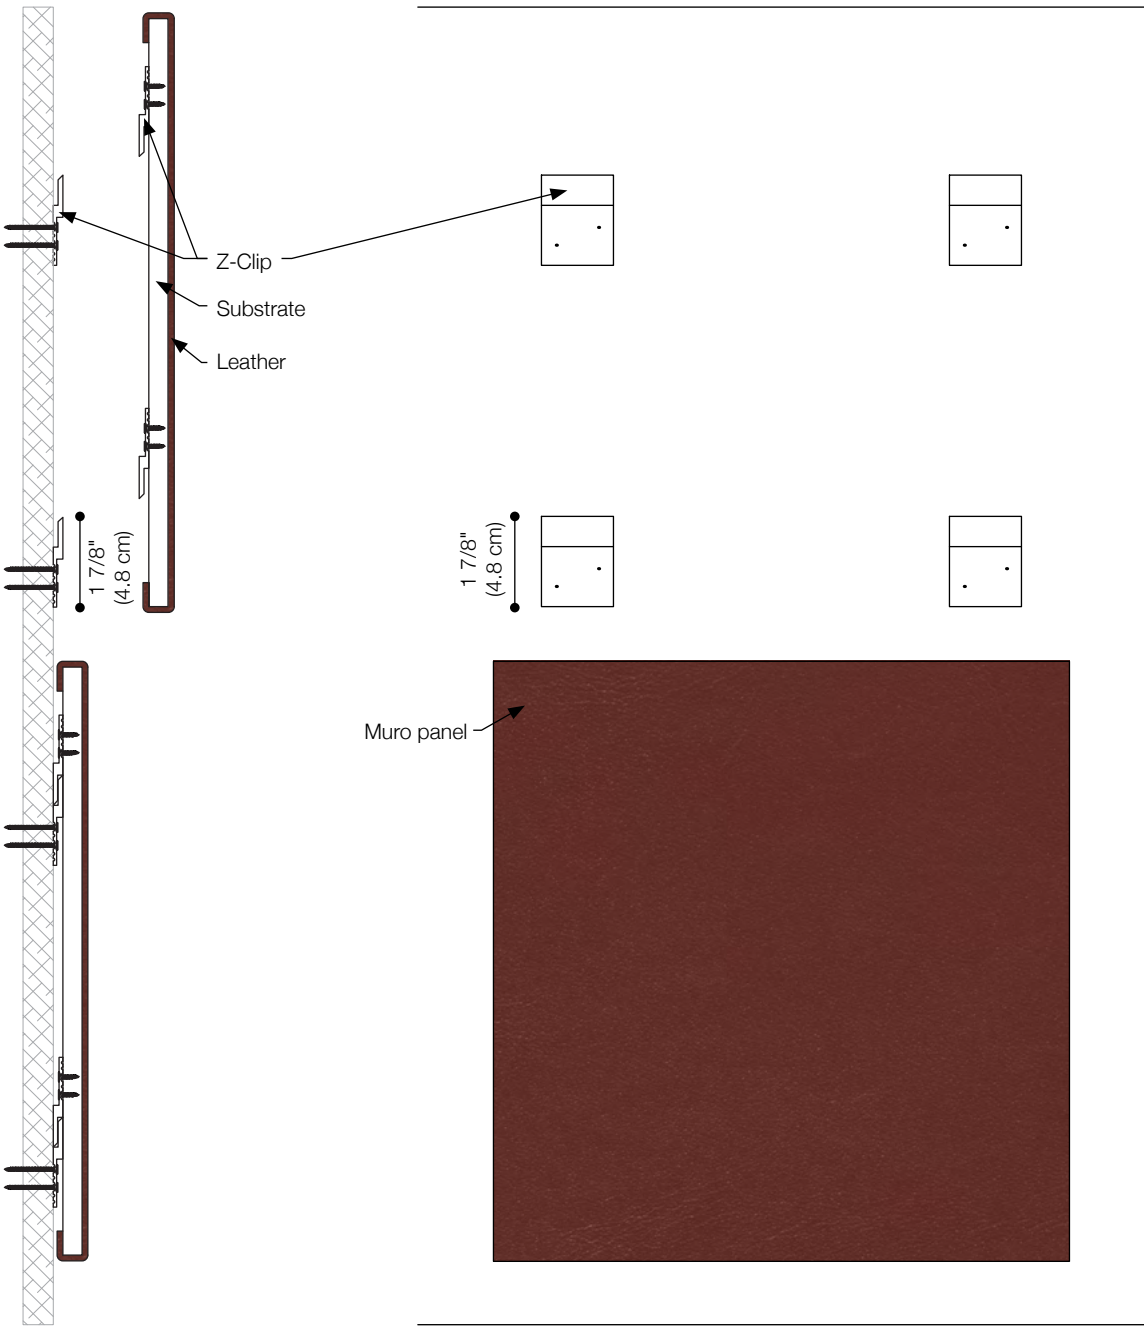

1 Section with Z-Clip Mounting
Scale: 3" = 1'-0"

2 Elevation with Z-Clip Mounting
Scale: 3" = 1'-0"

Specifications

Name	Muro
Minimum Size	1'-0" x 1'-6" (30.5 x 45.7 cm)
Maximum Size	4'-0" x 4'-0" (121.9 x 121.9 cm)
Thickness	7/8–1 in (2.2–2.5 cm)
Substrates	Standard or FR (Fire Rated) Plywood
Leather Types	AD, AL, AQ, AU, CA, CO, CV, DE, DL, DT, DV, ES, ET, FE, GE, HH*, HT, LC, LU, LW, MA, MM, PT, RA, RU, SA, SL, SS, UM, VO, VP, VZ *Haired Hide (HH) panels may not include all colors—black, brown and white; black and white; brown and white—and color inconsistencies will occur.
Weight	2.2–2.86 lb per ft ² (10.7–59.6 kg per m ²)
Maintenance	For finished leathers, wipe with a cool, damp cloth. For tougher soiling, use a pH-balanced soap and rinse. Repeat, if needed. For naked (aniline) leathers, wipe entire surface with a soft cloth and cool water to even out any abrasions or stains. Do not spot rub, for it will darken only that area. Occasional use of Spinneybeck maintenance products is recommended. Other leather cleaners such as saddle soap or household cleaners that may contain harsh chemicals, alcohol or ink removers should never be used.
Lead Time	Made to order and certain lead times will apply
Installation	All panels come preinstalled with Z-Clip fasteners for easy hanging and large panels may have two fasteners to ensure stability and support. The Z-Clips provided are 6 ft (1.8 m) in length and can be cut to fit according to site requirements. Spinneybeck offers installation services; however, application is basic and can be provided by a reputable general contractor. Additional blocking at installation site may be required.
Custom	Custom options include Beveled, Button Tufted, Fluted, Laser Engraved, Painted, Quilted, Stitched. Panel sizes beyond the standard minimum and maximum sizes must be quoted. Please refer to Custom Muro for more information.
Flammability	ASTM E 84: Class B (FR Plywood Substrate)
Standard Colors	Refer to Color Book for available colors