

# Muro

Wall Panel



spinneybeck



## Muro elevates with endless possibilities.

Numerous design options combined with Spinneybeck's unparalleled collection of leather styles and colors offer endless possibilities for the wall. Muro panels add character and sophistication to a wide range of wall, headboard, and ceiling applications. Available in more than 600 colors, these bespoke leather-wrapped wall panels offer a refined alternative to vertical surfacing. Accent with stitching and fluting, beveled edges, laser engraving, or other embellishment options to enhance and elevate any interior space.



Muro at 777 Partners



Custom Debossed Muro at Greenberg Taurig

Custom Quilted Muro at Sands Capital Management



Custom Fluted Muro at Sands Capital Management



Custom Laser Engraved Muro at Uber



Custom Stitched Muro at WeWork Dupont Circle

Embellishment Options

Beveled

Button Tufted

bergTraurig

Debossed

Fluted

Laser Engraved

Quilted

Stitched

Quilted Options

Diamond

Parallel


Rectangle

Square

<b>Product</b>	Muro
<b>Content</b>	European cowhide + Plywood substrate
<b>Minimum Size</b>	1'-0" x 1'-6" (30.5 x 45.7 cm)
<b>Maximum Size</b>	4'-0" x 4'-0" (121.9 x 121.9 cm)
<b>Thickness</b>	1–1 1/8 in (2.5–2.8 cm) (includes Z-Clips)
<b>Substrate Options</b>	Standard or FR (Fire Rated) MDF
<b>Embellishment Options</b>	Beveled, Button Tufted, Fluted, Laser Engraved, Quilted, Stitched
<b>Quilted Options</b>	Diamond, Parallel, Rectangle, Square
<b>Custom</b>	FilzFelt© felts and panel sizes beyond the standard minimum and maximum sizes must be quoted
<b>Durability</b>	Contract or residential
<b>Lead Time</b>	Made to order and certain lead times will apply
<b>Maintenance</b>	For finished leathers, wipe with a cool, damp cloth. For tougher soiling, use a pH balanced soap such as Dawn at a 1:10 ratio of soap to water, then rinse. Repeat if needed. For naked (aniline) leathers, wipe the entire surface with a soft cloth and cool water to even out any abrasions or stains. Do not spot rub, as this will darken only the treated area. Occasional use of water-based leather cleaner, conditioner, and protector is recommended. Other leather cleaners, such as saddle soap or household cleaners that may contain harsh chemicals, alcohol, or ink removers, should never be used.
<b>Installation</b>	Install with Z-Clips provided (wall screws not included). The Z-Clips provided are 6 ft (1.8 m) in length and can be cut to fit according to site requirements.
<b>Variation</b>	Color variation of naked leathers may be more pronounced beyond the normal commercial range. A Cutting for Approval (CFA) is required for all orders.

# Standard Leathers

Available in the full color range of each leather below—refer to Color Book or [spinneybeck.com/colorbook](http://spinneybeck.com/colorbook) for complete color selection. (Swatches shown to indicate grain texture only.)

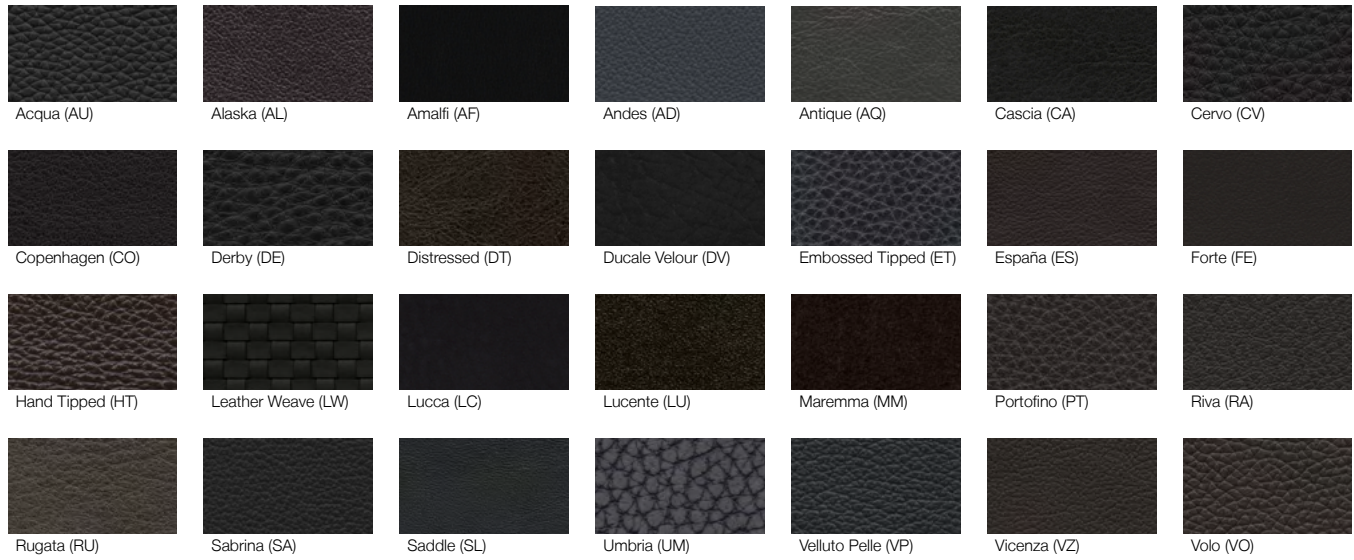

# Standard Thread Colors

