



Parasol Trellis

Laser Engraved Tile


spinneybeck

About



An enduring fascination and affection for Moorish lusterware ceramics by Genevieve Bennett inspired the creation of Parasol Trellis. The precise engraving of the design into the surface of beautiful leather creates an intriguing synergy of the ancient and the contemporary. . Historically the art of laser engraving or laser etching was used to create intricate patterns and designs predominately on materials such as wood and glass. Spinneybeck extends this technique to full grain, vegetable tanned Belting Leather combining the beauty and warmth of a natural product with the precise detailing allowed by laser technology.

Genevieve Bennett is a visual designer based in London whose bespoke leatherwork is rooted in the tradition of the decorative arts and yet has a bold contemporary aesthetic of intelligence and creative beauty.

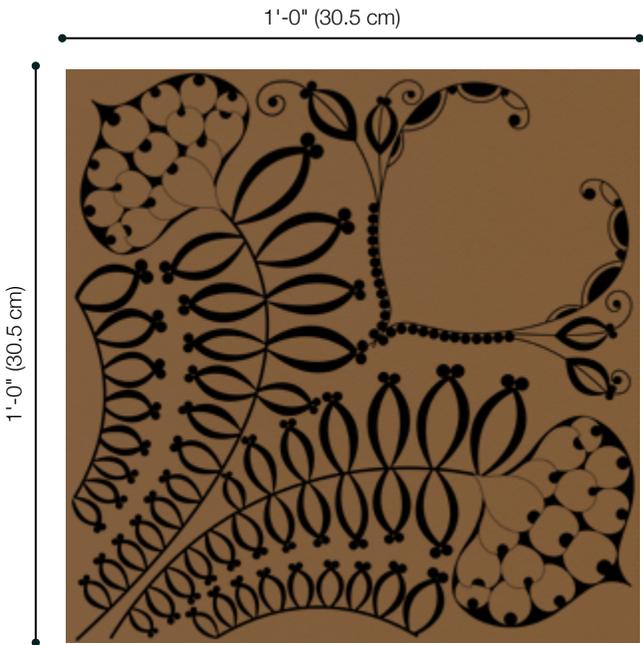

Parasol Trellis Laser Engraved Tile
Scale: 3" x 1'-0"

About



Elevation
Scale: 1" = 1'-0"

About



Elevation
Scale: 1" = 1'-0"

Specifications

Name	Parasol Trellis Laser Engraved Tile
Designer	Genevieve Bennett
Size	12 x 12 in (30.5 x 30.5 cm)
Leather Type	Belting Leather (BL)
Thickness	2.8–3.2 mm
Weight	7.0–8.0 oz / ft ² (2136–2441 g / m ²)
Grain Texture	Smooth, tight
Finish	Light, protective water resistant
Primary Uses	Vertical, cabinets, folding screens, doors, headboards
Industry	Contract, hospitality, residential
Maintenance	Wipe entire surface with a soft cloth and cool water to even out any abrasions or stains. Do not spot rub, for it will darken only that area. Occasional use of Spinneybeck Aniline Leather Cleaner, Conditioner & Protector or Aniline Leather Maintenance Kit is recommended. Other leather cleaners such as saddle soap or household cleaners that may contain harsh chemicals, alcohol or ink removers should never be used.
Lead Time	Made to order and certain lead times will apply
Installation	Tiles may be trimmed and adjusted for size in the field with a straight edge and a commercial grade utility blade. Allow to acclimate on site for a minimum of one to two weeks. Vertical application may be over finished grade plywood for new-build installations and multi-ply over existing drywall. Tiles will not adhere to drywall, gypsum board, or masonite. It is important that the surface be clean, dust-free and level. To ensure a successful installation, Spinneybeck strongly recommends that an installer who has experience with leather tile and has a long history of successful installations. For detailed instructions, please download Genevieve Bennett Collection Installation and Maintenance or contact Spinneybeck Customer Service.
Colorfastness to Light	Class 2–3
Colorfastness to Crocking	Class 4–5 (dry), Class 4 (wet)
Flammability	ASTM E 84: Class B (flame treated) Boston Fire Dept BFD IX-1: Pass (flame treated) CAL 117: Pass
Durability + Strength	Breaking Force ASTM D 2208: 500+ lb Elongation ASTM D 2211: 0–10% at 50 lb

Standard Colors



BL 1905



BL 1906



BL 1907



BL 1910



BL 1911



BL 1913



BL 1904



BL 1924



BL 1903



BL 1922



BL 1921



BL 1902



BL 1923



BL 1901



BL 1925



BL 1914



BL 1919



BL 1916



BL 1920



BL 1918



BL 1917



BL 1915



BL BLCK