




Sassolino
Upholstery Leather

spinneybeck

About



Named for its pronounced texture, Sassolino ('pebble' in Italian) is produced from a premium selection of raw material from northern and southern Germany and Switzerland. The enhanced pebble grain leather has a unique suppleness in a heavier weight and is suitable for upholstery applications. High quality dyes provide excellent lightfastness and allow a greater saturation and dye enrichment than ordinary upholstery leathers.

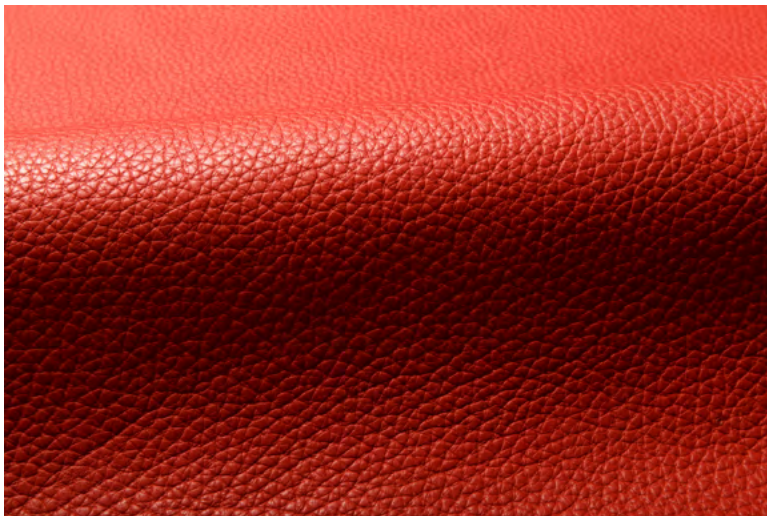

Specifications

Name	Sassolino (SS)
Content	European cowhide
Origin	Italy
Hide Size	55–65 ft ² (5.1–6.0 m ²)
Thickness	1.4–1.6 mm
Weight	3.75–4.0 oz / ft ² (1144–1221 g / m ²)
Grain	Enhanced
Grain Texture	Pronounced pebble grain
Tannage	Chrome
Dye	Aniline
Finish	Medium
Primary Uses	Upholstery, handrails, wall panels, architectural applications
Industry	Automotive, aviation, contract, hospitality, marine, residential
Maintenance	Wipe with a cool, damp cloth. For tougher soiling, use a pH-balanced soap and rinse. Repeat, if needed. Occasional use of Spinneybeck Finished Leather Cleaner, Conditioner & Protector or Finished Leather Maintenance Kit is recommended. Other leather cleaners such as saddle soap or household cleaners that may contain harsh chemicals, alcohol or ink removers should never be used.
Custom	Custom colors available
Special Services	Perforated and embossed available with an upcharge
Colorfastness to Light	Class 4–5
Colorfastness to Crocking	Class 4–5 (dry), Class 5 (wet)
Flammability	ASTM E 84: Class A (flame treated) Boston Fire Dept BFD IX-1: Pass (flame treated) BS EN1021 (Part I and Part II): Pass BS 5852 Crib 5 and Crib 7: Pass (flame treated) CAL 117: Pass CAL 133: Successfully used in CAL 133 applications with Firegard F187 fire backer material or equivalent (flame treated) Cigarette Ignition Resistance NFPA 260: Class 1 FAR 25.853(a) 60 sec vertical burn, 12 sec vertical burn. Oil burner-fire block: Pass
Durability + Strength	Abrasion ASTM D 7255: n/a Breaking Force ASTM D 2208: 551 lb Elongation ASTM D 2211: 30–50% at 50 lb Flex ASTM D 2097: 70,000+ flexes Tearing Strength ASTM D 4705: 51 lb


Standard Colors



SS 2250



SS 2251



SS 2260



SS 2253



SS 2252



SS 2255



SS 2256




SS 2254




SS 2257



SS 2258



SS 2259



SS BLCK