



**Starflower**  
Debossed Tile

spinneybeck


# About

---



Debossed tiles in the Genevieve Bennett Studio Collection add a decorative element to standard walls and headboards. Influenced by art deco textiles and jewelry and vintage Balinese batik textiles, Starflower unites floral design with geometric structure. These full grain aniline dyed leather tiles with aqueous-based water repellent finish feature a single layer leather panel debossed with pattern. Debossing impresses a die into the surface of the leather creating an indentation of the pattern. Individual tiles repeat to create engraved stylized floral and geometric designs.


Genevieve Bennett is a visual designer based in London whose bespoke leatherwork is rooted in the tradition of the decorative arts and yet has a bold contemporary aesthetic of intelligence and creative beauty.

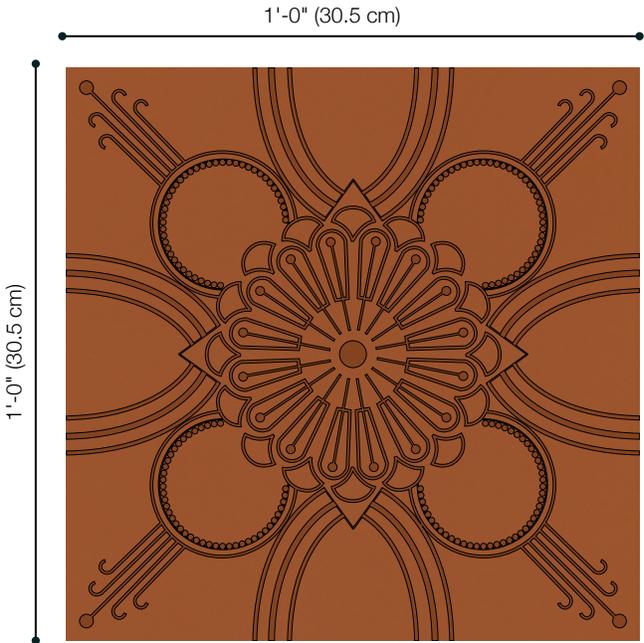

**Starflower Debossed Tile**  
Scale: 3" x 1'-0"

# About

---

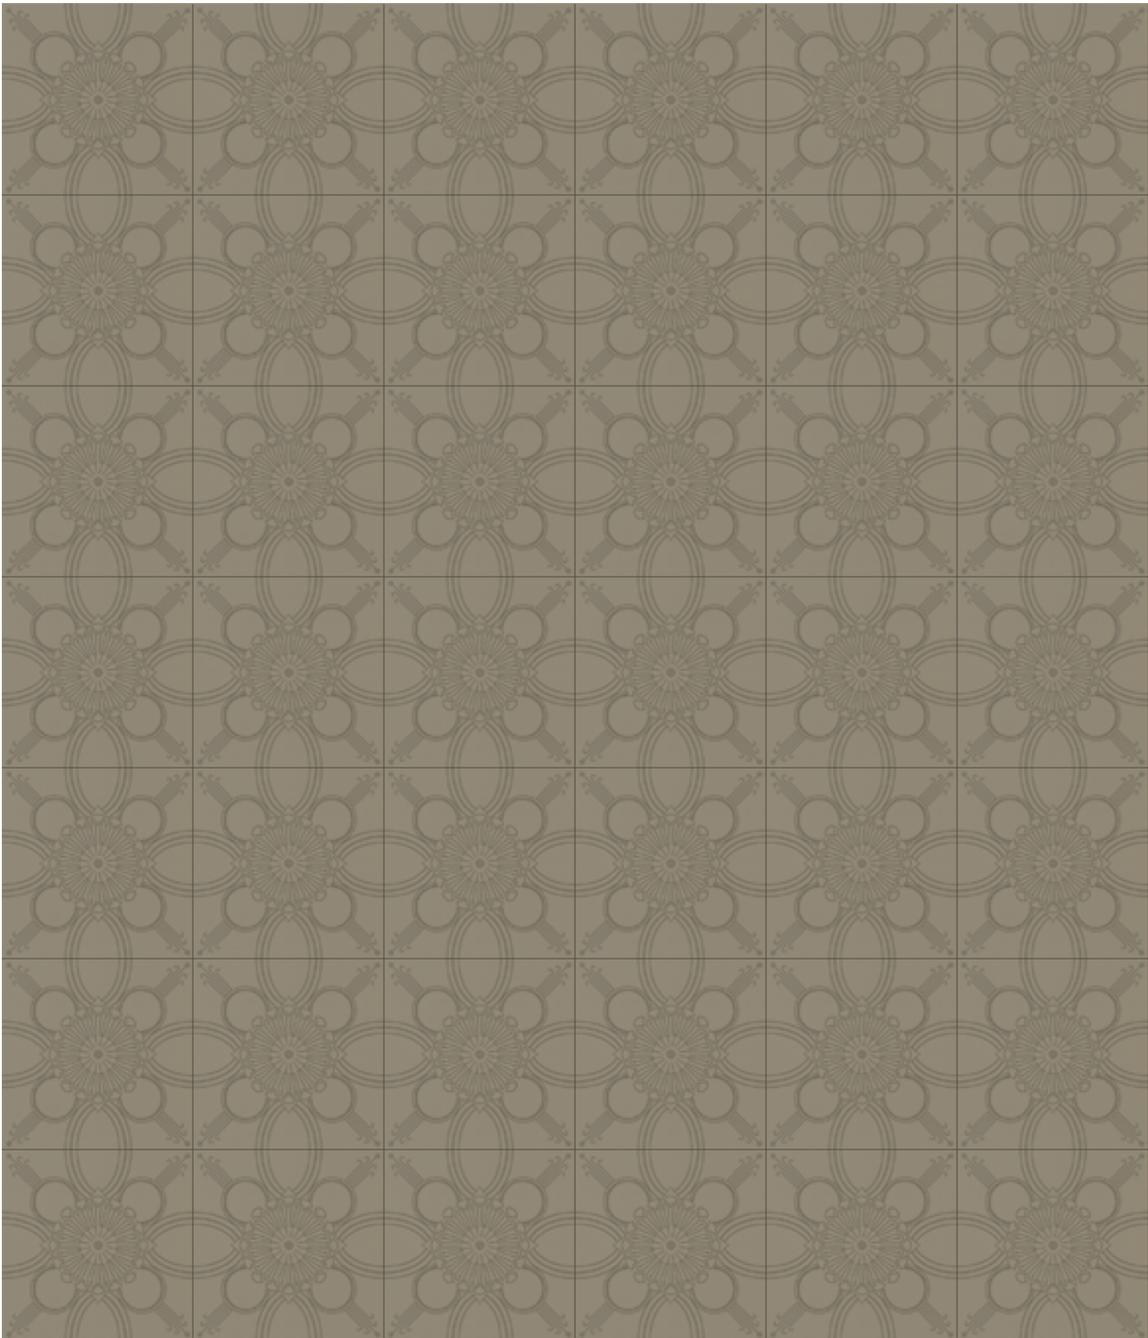

**Elevation**  
Scale: 1" = 1'-0"

# Specifications

<b>Name</b>	Starflower Debossed Tile
<b>Designer</b>	Genevieve Bennett
<b>Size</b>	12 x 12 in (30.5 x 30.5 cm)
<b>Leather Type</b>	Belting Leather (BL)
<b>Thickness</b>	2.8–3.2 mm
<b>Weight</b>	7.0–8.0 oz / ft <sup>2</sup> (2136–2441 g / m <sup>2</sup> )
<b>Grain Texture</b>	Smooth, tight
<b>Finish</b>	Light, protective water resistant
<b>Primary Uses</b>	Vertical, cabinets, folding screens, doors, headboards
<b>Industry</b>	Contract, hospitality, residential
<b>Maintenance</b>	Wipe entire surface with a soft cloth and cool water to even out any abrasions or stains. Do not spot rub, for it will darken only that area. Occasional use of Spinneybeck Aniline Leather Cleaner, Conditioner & Protector or Aniline Leather Maintenance Kit is recommended. Other leather cleaners such as saddle soap or household cleaners that may contain harsh chemicals, alcohol or ink removers should never be used.
<b>Lead Time</b>	Made to order and certain lead times will apply
<b>Installation</b>	Tiles may be trimmed and adjusted for size in the field with a straight edge and a commercial grade utility blade. Allow to acclimate on site for a minimum of one to two weeks. Vertical application may be over finished grade plywood for new-build installations and multi-ply over existing drywall. Tiles will not adhere to drywall, gypsum board, or masonite. It is important that the surface be clean, dust-free and level. To ensure a successful installation, Spinneybeck strongly recommends that an installer who has experience with leather tile and has a long history of successful installations. For detailed instructions, please download Genevieve Bennett Collection Installation and Maintenance or contact Spinneybeck Customer Service.
<b>Colorfastness to Light</b>	Class 2–3
<b>Colorfastness to Crocking</b>	Class 4–5 (dry), Class 4 (wet)
<b>Flammability</b>	ASTM E 84: Class B (flame treated) Boston Fire Dept BFD IX-1: Pass (flame treated) CAL 117: Pass
<b>Durability + Strength</b>	Breaking Force ASTM D 2208: 500+ lb Elongation ASTM D 2211: 0–10% at 50 lb

# Standard Colors

---



BL 1905



BL 1906



BL 1907



BL 1910



BL 1911



BL 1913



BL 1904



BL 1924



BL 1903



BL 1922



BL 1921



BL 1902



BL 1923



BL 1901



BL 1925



BL 1914



BL 1919



BL 1916



BL 1920



BL 1918



BL 1917



BL 1915



BL BLCK