



**Umbria**  
Upholstery Leather


spinneybeck

# About

---



Inspired by the region of Italy known for its scenic hilltop towns, Umbria is an embossed two-toned leather offered in a range of rich tones. This dramatic leather, which resembles a geographic map, is created through a proprietary process to achieve a lighter effect on the top of the grain. Produced from European hides, Umbria is a finished leather with exceptional stain and abrasion resistance that evokes a soft, suede-like appearance. Appropriate for automotive, aviation, contract, hospitality, marine and residential environments, this versatile leather is a sophisticated upholstery option and can add unexpected texture to handrails and wall panels.

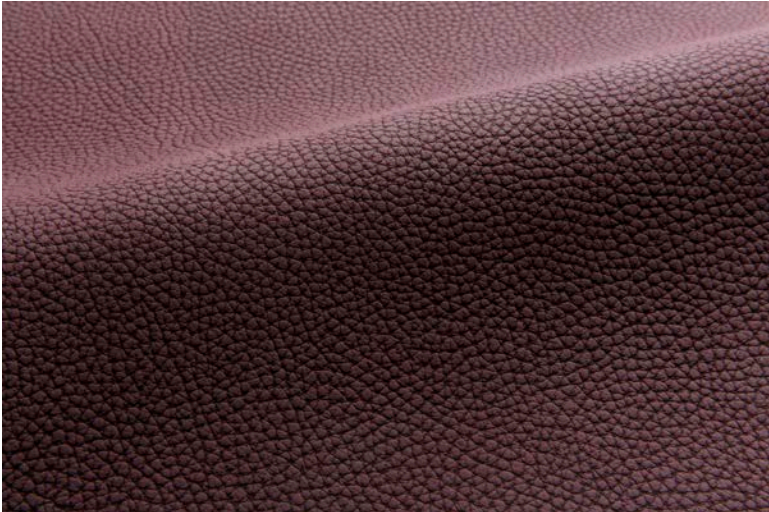


# Specifications


<b>Name</b>	Umbria (UM)
<b>Content</b>	European cowhide
<b>Origin</b>	Italy
<b>Hide Size</b>	50–60 ft <sup>2</sup> (4.6–5.6 m <sup>2</sup> )
<b>Thickness</b>	1.3–1.4 mm
<b>Weight</b>	3.25–3.5 oz / ft <sup>2</sup> (992–1068 g / m <sup>2</sup> )
<b>Grain</b>	Enhanced
<b>Grain Texture</b>	Raised pebble
<b>Tannage</b>	Chrome
<b>Dye</b>	Aniline
<b>Finish</b>	Light
<b>Primary Uses</b>	Upholstery, handrails, wall panels, architectural applications
<b>Industry</b>	Automotive, aviation, contract, hospitality, marine, residential
<b>Maintenance</b>	Wipe with a cool, damp cloth. For tougher soiling, use a pH-balanced soap and rinse. Repeat, if needed. Occasional use of Spinneybeck Finished Leather Cleaner, Conditioner & Protector or Finished Leather Maintenance Kit is recommended. Other leather cleaners such as saddle soap or household cleaners that may contain harsh chemicals, alcohol or ink removers should never be used.
<b>Custom</b>	Custom colors not available
<b>Special Services</b>	Flame treatment and perforated available with an upcharge
<b>Colorfastness to Light</b>	Class 4–5
<b>Colorfastness to Crocking</b>	Class 4–5 (dry), Class 5 (wet)
<b>Flammability</b>	ASTM E 84: Class A (flame treated) Boston Fire Dept BFD IX-1: Pass (flame treated) BS EN1021 (Part I and Part II): Pass BS 5852 Crib 5 and Crib 7: Pass (flame treated) CAL 117: Pass CAL 133: Successfully used in CAL 133 applications with Firegard F187 fire backer material or equivalent (flame treated) Cigarette Ignition Resistance NFPA 260: Class 1 FAR 25.853(a) 60 sec vertical burn, 12 sec vertical burn. Oil burner-fire block: Pass IMO Resolution A.652 (16): Pass IMO Resolution A.653 (16) Part 2 and 5: Pass (flame treated) NF P 95 512 1986 (Electric Burner Test): Class M1 (flame treated), Class M2 (flame treated)
<b>Durability + Strength</b>	Abrasion ASTM D 7255: n/a Breaking Force ASTM D 2208: 250 lb Elongation ASTM D 2211: 30–50% at 50 lb Flex ASTM D 2097: 70,000 flexes Tearing Strength ASTM D 4705: 55 lb

# Standard Colors


---




UM 1451



UM 1452




UM 1470



UM 1469




UM 1468




UM 1467



UM 1466



UM 1459



UM 1455



UM 1454



UM 1456



UM 1457



UM 1453




UM 1461



UM 1458



UM 1460




UM 1462



UM 1463



UM 1465



UM 1464