




Derby
Upholstery Leather

spinneybeck

About



Derby is made from the finest and clearest bovine material. The premium, select hides used to produce Derby are obtained exclusively from the Piedmont and Tuscany regions of northern Italy. The vegetable combination retannage creates the luxurious, raised grain texture and robust roundness of hand. This clear leather reveals its natural characteristics while retaining high performance, aging beautifully and creating a fine patina. The high quality dyes allow a greater saturation and dye enrichment than ordinary upholstery leathers. Derby features a breathable protective finish which is impregnated into the leather, becoming an integral part of the material, and protects the surface while keeping the user cool.

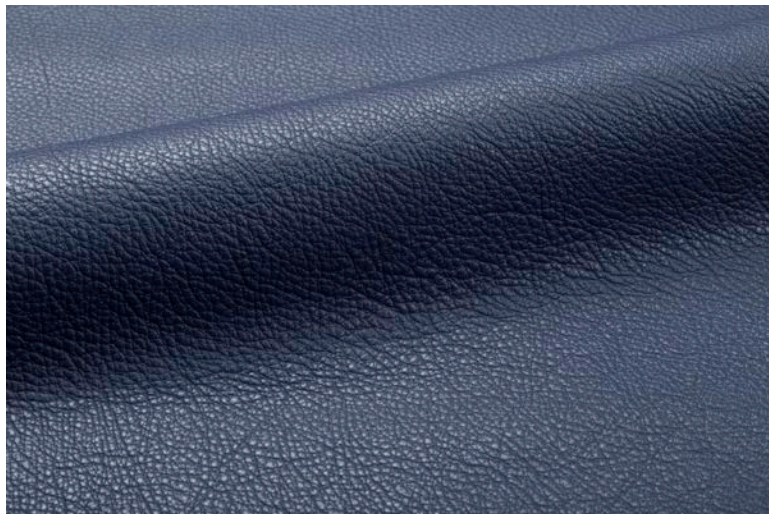

Specifications

Name	Derby (DE)
Content	European cowhide
Origin	Italy
Hide Size	55–60 ft ² (5.1–5.6 m ²)
Thickness	1.4–1.6 mm
Weight	3.5–4.0 oz / ft ² (1068–1221 g / m ²)
Grain	Full
Grain Texture	Raised
Tannage	Combination
Dye	Aniline
Finish	Medium
Primary Uses	Upholstery, handrails, wall panels, architectural applications
Industry	Automotive, aviation, contract, hospitality, marine, residential
Maintenance	Wipe with a cool, damp cloth. For tougher soiling, use a pH-balanced soap and rinse. Repeat, if needed. Occasional use of Spinneybeck Finished Leather Cleaner, Conditioner & Protector or Finished Leather Maintenance Kit is recommended. Other leather cleaners such as saddle soap or household cleaners that may contain harsh chemicals, alcohol or ink removers should never be used.
Custom	Custom colors available
Special Services	Flame treatment, perforated, and embossed available with an upcharge
Colorfastness to Light	Class 4
Colorfastness to Crocking	Class 4 (dry), Class 3 (wet)
Flammability	ASTM E 84: Class A (flame treated) Boston Fire Dept BFD IX-1: Pass (flame treated) BS EN1021 (Part I and Part II): Pass BS 5852 Crib 5 and Crib 7: Pass (flame treated) CAL 117: Pass CAL 133: Successfully used in CAL 133 applications with Firegard F187 fire backer material or equivalent (flame treated) Cigarette Ignition Resistance NFPA 260: Class 1 FAR 25.853(a) 60 sec vertical burn, 12 sec vertical burn. Oil burner-fire block: Pass IMO Resolution A.652 (16): Pass IMO Resolution A.653(16) Part 2 and 5: Pass (flame treated) NF P 95 512 1986 (Electric Burner Test): Class M1 (flame treated), Class M2 (flame treated)
Durability + Strength	Abrasion ASTM D 7255: n/a Breaking Force ASTM D 2208: 300 lb Elongation ASTM D 2211: 30–50% at 50 lb Flex ASTM D 2097: 70,000 flexes Tearing Strength ASTM D 4705: 50 lb

Standard Colors



DE 0246



DE 0439



DE 0249



DE 0247



DE 0241



DE 0240



DE 0248



DE 0244



DE 0251



DE 0227



DE 0225



DE 0243



DE 0242



DE 0250



DE 0238



DE 0200



DE 0206




DE 0203




DE 0231




DE 0204



DE 0230



DE 0228



DE 0234



DE COAL